

Filed for
 record at
 10³ A.M.
 of July 13th
 1889
 E.H.M.
 Co. Clerk by
 J. Dooly

Know all men by these Presents,

That the Baker City and Malheur Wagon Road and Bridge Company (a Corporation) in consideration of Fifteen Thousand (\$1500⁰⁰) dollars to it paid by the County of Baker in the State of Oregon to hereby grant, bargain, sell and convey to said Baker County State of Oregon, forever, the following described parcel of real estate to wit:

The certain Wagon and Toll Road (known as the Dooly road) commencing at the junction of the Canyon City and Malheur roads at a point about four miles south of Baker City in Baker County, State of Oregon, running thence southerly miles to the town of Bridgeport in said County, thence about seven miles to the town of Eldorado in Malheur County, State of Oregon.

Together with the improvements, improvements and appurtenances thereto appertaining, or in any way belonging, and also all its estate, right, title and interest at law and equity therein and thereto, including power and right of conveyance.

To have and to hold the same to the said Baker County and State of Oregon, its heirs and assigns forever - and it does covenant with the said County that the said real estate is free from all incumbrances, and that it will, and its executors and administrators shall warrant and defend the same to the said heirs and assigns forever, against the lawful claims and demands of all persons whomsoever.

In witness whereof the Corporation hereunto set their hands and seals this 13th day of

July A. D. 1889

Expire in the presence of.

J. J. Dooly
 C. H. M. C.

State of Oregon
 County of Baker

John J. Dooly

W. B. Bowen by John Dooly

his Attorney in fact

John J. Dooly

This certifies that on this 13th day of July A. D. 1889 before me the undersigned a

Notary Public in and for the said County and State.
 personally appeared the within named John J. Doolley and
 C. B. Brown by John J. Doolley his attorney in fact also
 John J. Doolley who are known to me to be the identical
 persons named in and who executed the within instrument
 and acknowledged to me that they executed the same
 freely and voluntarily for the uses and purposes therein
 mentioned.

In testimony whereof I have hereunto set my
 hand and Notarial seal the day and year last
 above written.

W. N. Maurice Notary Public

in and for the State of Oregon.

Notarial Seal

Frederick Maria Peterson M. P. Peterson to Alongo P. Turley

Record

I now all Men by their Parents That we
 Maria Peterson and M. P. Peterson her husband of
 1889 at 9 Douglas County and State of Nebraska in consideration
 and sum of the sum of One Thousand and no/100 Dollars in
 C. N. Min. Land paid by Alongo P. Turley of Omaha of Douglas
 Co. and County and State of Nebraska, do hereby sell convey
 by M. P. into the said Alongo P. Turley the following described
 premises situated in the County of Park and State
 of Oregon to wit:

Lot One 117 Five 127 Three 137 and
 four 147 Place sixty 160 and lots Nine 197 Ten 107
 Eleven 117 Twelve 127 Thirteen 137 Fourteen 147
 fifteen 157 sixteen 167 Seventeen 177 and Eighteen
 187 in Place Forty eight (48) in Lexington Addition
 to Park City Oregon, subject to Taxes.

Together with all the Tenements
 hereditaments and appurtenances to the same belonging
 and all the estate, right, title, interest, claim or demand
 whatsoever of the said Maria and M. P. Peterson of in
 or to the same, or any part thereof.

To Have and to hold the
 above described premises with the appurtenances with
 the said Alongo P. Turley, and to his heirs and assigns

Order Approving & Opening & Locating
Commissioner's Journal, Book 6 p 510

Field notes of the Bird Spaulding Co. road in sec 55, T100 R 40 E 10th County
 Beginning at a point in the present traveled road leading from
 Baker to Auburn, from which the N.W. cor of sec 55 said 1/4 + Rg.
 bears North, 20.30 chs. dist. Set a quartzite rock 4x4 on top & 8x10
 on bottom, 14ms long flush with ground. Marked R on East side
 & "X" on top. Thence North, 22° E, 8.70 chs. set quartzite rock, 5x8
 ms on top. Pins long. flush with ground. Marked "R" on side & "X"
 on top. Thence N 72° 15' E, 9.10 chs set lava rock 6x6 ms on top, 10 ms long
 flush with ground. Marked "R" on side & "X" on top. Thence N 88°
 10' E, 3.57 chs set quart. with small rock, flush with surface of
 ground. Thence N 78° 00' E, 6.30 chs. set quartzite rock 4x6, 10 ms long
 flush with ground. marked "R" on side & "X" on top. Thence N
 38° 45' E, 5.0 chs set quartzite rock 8x8 ms, 12 ms long flush with
 ground. Marked "R" on side & "X" on top. Thence N 30° 30' N, 4.00 chs
 set a lava rock, 6x6 ms on top, 14ms long. Marked "R" on side &
 "X" on top. Thence N 88° 30' E, 2.50 chs dry gulch, no culvert needed.
 2.75 chs. set quartzite rock 8x10 ms, 12 ms long flush with ground.
 Marked "R" on side & "X" on top. Thence N 57° 35' E, 3.8 chs. set
 basalt rock 4x8 ms, 12 ms long, flush with ground. Thence N 88°
 00' E, 4.75 chs set basalt rock 8x10 ms on top & 14ms long, flush with
 ground. Marked "R" on side & "X" on top for terminus of survey.
 from which point the 1/4 sec. cov. on north side of said sec
 5, bears S 78° 30' E, 15.70 chs. dist. Ira L Hoffman, Co. Surveyor

"
 Powell Machine et al Road in sec 25 + 32 T 100 R 40 E
 Order Approving & Opening and Locating Old Road,
 Commissioner's Journal, Book 7 p 220.

Field notes - Beginning in the traveled Co. Road, known as the
 Dually Cut Road, at which point extra basalt stone 5x8x14 ms, mark
 ed R from which the N.E. cor. of the S E 1/4 of the NW 1/4 of sec 25, T 100 R 40 E
 bears N 88° 30' N, 12.30 chs dist. Thence West & point 31 chs South
 of above said 1/4 sec. cor. Thence, South on the same line, 23.70 chs, Thence
 S 33° 30' N, 10.20 chs set basalt stone, 8x8x18 ms, marked R
 Thence S 47° 45' E, 2.10 chs Thence S 1° 45' E, 1.30 chs, set point 4x4x14 ms
 for the mile point. Marked 1 M, 27.75 chs to a point 3.35 chs North of
 the 1/4 sec. cor. Thence West, 5.60 chs Thence S 76° 10' N, 11.20 chs &
 the intersection with the traveled line of said Dually Cut Road, set a
 basalt stone 6x6x24 ms, marked "R" for terminus of survey
 Total length of survey, one mile & 26.25 chs. Total length of old road
 between terminus of survey is one mile 18.30 chs.
 Aug 23, 1915 Ira L Hoffman County Surveyor

"
 Headley, M. H. et al County Road in sec, 21, 22, 28, 29, 30 -
 34 T 100 S 40 E R 70 E of Baker Cr.


Order Approving & Opening,
 Commissioner's Journal, Book 7 p 307
 Field notes - Beginning at a point in the Brewer Creek
 County Road, a stone 4x6x10 ms. marked "R" from which the
 Cr & sec. 21, 22, 28 + 29 T 100 S R 70 E bears South, 1285 ft dist.
 All courses run in a small variation of 19° E
 S 8° 10' E, 300 ft to Brewer Creek, 1335 ft aka stone 8x10x16 ms
 marked "R" from which the forward sec cr. bears N 65° 00' W, 220 ft
 dist. Thence S 21° 55' E, 335 ft aka stone 6x1x12 ms. (6/104)



marked "Rt". Thence S 7° 05' N, 230 ft extra stone 3 X 5 X 2 ins marked "Rt".
 Thence S 20° 00' N, 530 ft extra stone 6 X 8 X 10 ins. marked "Rt". Thence S
 17° 30' N, 445 ft extra stone marked "Rt". Thence S 10° 00' N following
 the contour of the hills 100 ft extra stone 5 X 10 X 12 ins, marked "Rt".
 Thence S 73° 25' E, 200 ft extra stone 5 X 8 X 16 ins, marked "Rt" from
 which the $\frac{1}{2}$ sec cor. on line between sec 27 & 28 bears N 57° 00' E
 3 ft dist. Thence S 30° 40' E, 905 ft, set a stone 3 X 2 X 6 ins, marked "Rt".
 Thence S 11° 57' E, 260 ft to the one mile point, 500 ft, set a stone 4 X 10
 X 14 ins marked "Rt". Thence S 11° 20' N, 450 ft extra stone 6 X 6 X 15 ins
 marked "Rt". Thence S 21° 10' N, 525 ins a gulch, 925 ft extra piece of
 wagon tire, the same being the cor to Secs 27, 28, 33 & 34. Thence South
 on sec. line 3762 ft to the mile point, 520 ft cor to sec 33, 34
 4+3, a stone 4 X 8 ins, probably marked. Thence South on sec. line,
 770 ft extra stone 4 X 6 X 16 ins, marked "Rt". Thence S 22° 00' N, 220 ft
 set a stone 6 X 8 X 16 ins, marked "Rt". Thence S 18° 00' E, 390 ft to point
 on said sec. line, set a stone 6 X 8 X 20 ins, marked "Rt". Thence S 23°
 00' N, 350 ft extra stone 6 X 8 X 18 ins, marked "Rt". Thence S 14° 58' E
 313 ft extra stone 10 X 2 X 18 ins, marked "Rt". Thence S 34° 30' E, 160 ft to
 point on said sec. line, set a stone, marked "Rt". Thence South 1687 ft
 to the three mile point, 1800 ft extra stone 4 X 6 X 16 ins. marked "Rt".
 from which the cor. to said sec 3, 4, 9 & 10 bears South 620 ft dist.
 Thence S 22° 15' N, 230 ft, set a stone 4 X 8 X 6 ins, marked "Rt". Thence S
 31° 55' N, 205 ft, set a stone 5 X 8 X 4 ins, marked "Rt". Thence S 44° 05' N
 165 ft, set a stone 6 X 8 X 2 ins, marked "Rt". Thence S 57° 50' N, 175 ft
 extra stone 4 X 12 X 8 ins, marked "Rt". Thence S 45° 00' N, 95 ft, set a stone 6 X 4 X 12 ins
 marked "Rt". Thence S 74° 50' N, 66 ft extra stone 2 X 10 X 18 ins, marked
 "Rt". Thence N 8° 10' E, 145 ft to the South line & said sec 4, set a stone
 4 X 4 X 6 ins marked "Rt". Thence West on said sec. line, 1175 ft, set
 a stone 4 X 5 X 10 ins, marked "Rt". Thence S 67° 30' N, 200 ft extra stone
 marked "Rt". Thence S 48° 00' N, 110 ft extra stone 4 X 4 X 16 ins, marked
 "Rt". Thence S 71° 30' N, 215 ft, set a stone 5 X 8 X 14 ins, marked "Rt".
 Thence N 48° 35' N, 105 ft, set a stone 5 X 8 X 14 ins, marked "Rt".
 Thence N 1° 00' E, 160 ft from where the $\frac{1}{2}$ sec cor. on the South line
 of said sec 4, bears West 30 ft dist. Thence N 1° 50' E, 290 ft, set a
 stone 6 X 8 X 2 ins, marked "Rt". Thence N 13° 25' N, 230 ft to a point
 on the $\frac{1}{2}$ sec. line, set a stone 8 X 12 X 6 ins, marked "Rt". Thence North
 on the sec. line 499 ft to the four mile point, 3315 ft, set a stone
 4 X 10 X 20 ins, marked "Rt". Identical with the "Rt" cor. of the S E $\frac{1}{2}$ of the
 N M $\frac{1}{4}$ of said sec 4. Thence West, 765 ft, set a stone 8 X 10 X 12 ins, mark
 ed "Rt". Thence N 35° 35' N, 895 ft, set a stone 5 X 7 X 12 ins, marked "Rt".
 Thence North on the $\frac{1}{2}$ sec. line, 714 ft to the five mile point, 1010 ft
 extra stone 4 X 4 X 16 ins, marked "Rt". Thence S 48° 15' E, 285 ft, a gulch, set a stone 4 X
 6 X 4 ins, marked "Rt". Thence S 45° 00' N, 760 ft, set a stone 4 X 6 X 14 ins
 marked "Rt". Thence North 240 ft, set a stone 4 X 10 X 12 ins, mark-
 ed "Rt". Thence N 7° 20' E ^{450 ft} set a stone 4 X 6 X 10 ins. marked "Rt".
 Thence N 10° 00' E, 400 ft, set a stone 4 X 6 X 10 ins. marked "Rt".
 800 ft, set a stone 3 X 6 X 12 ins, marked "Rt". Also from same point N 7° 20' N,
 extra stone 4 X 5 X 2 ins, marked "Rt". Thence N 6° 40' E, 200 ft
 4 X 4 X 4 ins. marked "Rt". Thence N 10° 00' N, 420 ft, set a stone 4 X 5 X 12 ins
 marked "Rt". Thence N 25° 00' N, 330 ft extra stone 4 X 4 X 14 ins marked "Rt".
 Thence N 65° 20' N, 491 ft to the six mile point, 1185 ft, set a stone 5 X 8 X
 12 ins, marked "Rt". From which the cor. to said sec 3, 28, 29, 32 & 33
 bears N 66° 00' N, Thence N 49° 55' N, 697 ft extra stone 4 X 6 X 14 ins
 marked "Rt". Thence N 40° 45' N, 205 ft, set a stone 6 X 8 X 12 ins marked "Rt".

S.B. 2 Page 175

TOWNSHIP 10 SOUTH RANGE 40 EAST

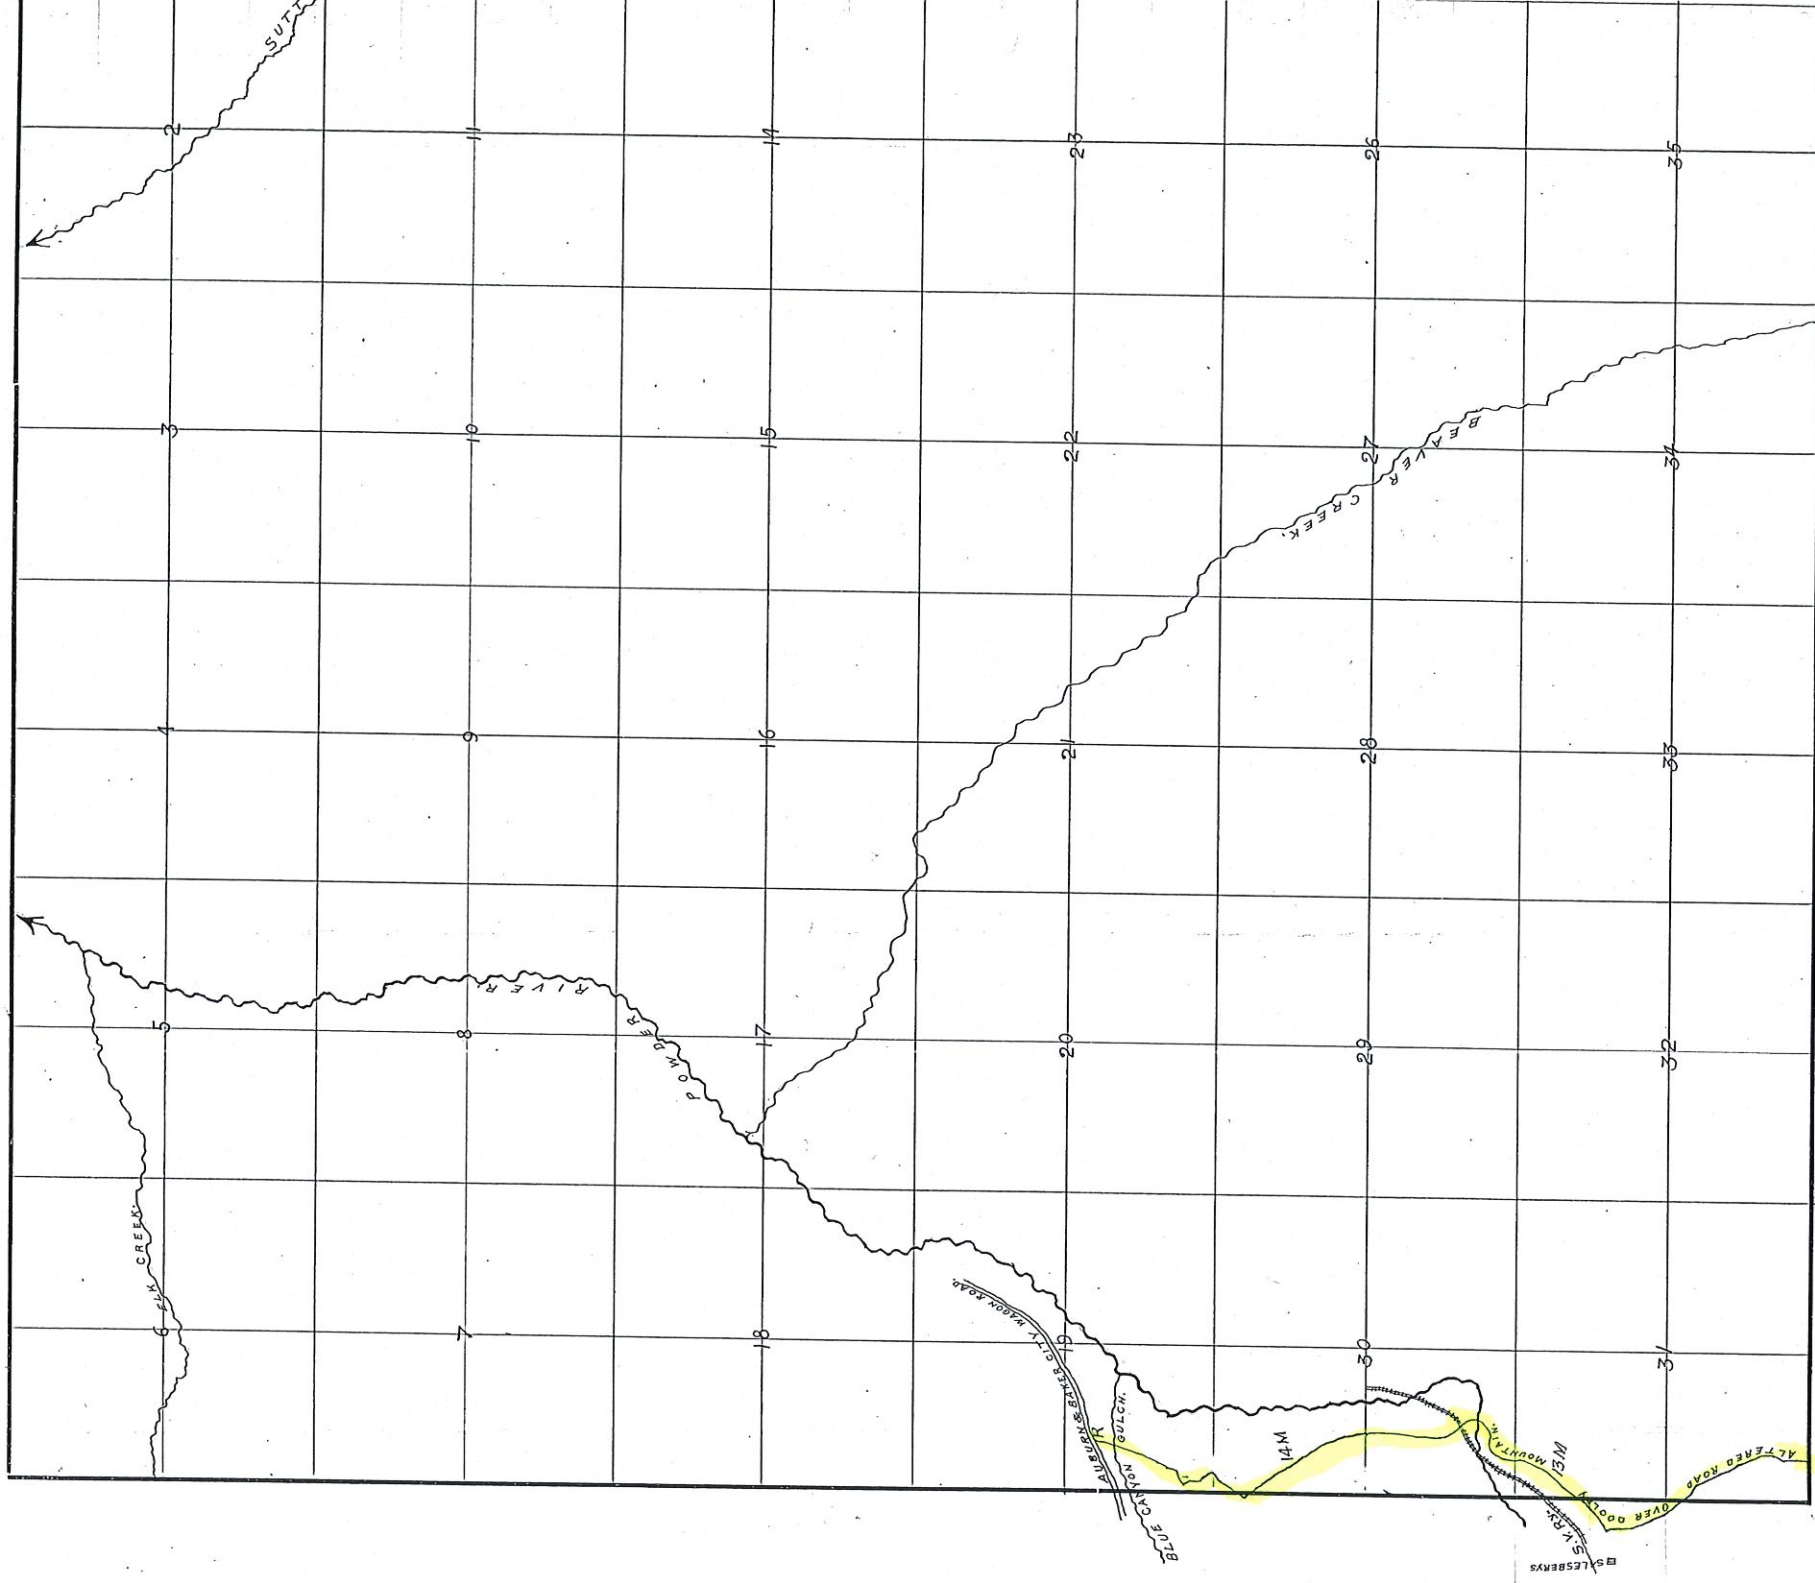

Surveyors Book 2 Page 199

TOWNSHIP 11 SOUTH RANGE 40 EAST MER.



