

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-5


History of original corner establishment:

W. B. Barr conducted the survey of Township 7 South, Range 43 East, W.M., August 29 to September 8, 1881, under GLO Contract No. 388, dated May 7, 1881.

The original notes of that survey relative to this corner state the following:

Marked a basalt stone, 16" x 9" x 6" for corner to sections 5, 6, 7 and 8. From which:

- A Western Larch, 18 ins. dia., bears N. 81° E., at 41 lks. dist.
- A Pine, 36 ins. dia., bears S. 36° E., at 75 lks. dist.
- A Pine, 18 ins. dia., bears N. 57° W., at 55 lks. dist.
- A Fir, 18 ins. dia., bears S. 49° W., at 57 lks. dist.

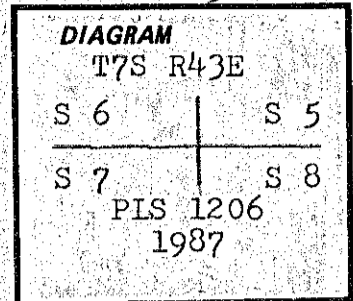

Description of corner evidence found:

Found a stone, 14" x 10" x 8", 30 ft. North from the corner location. The stone was marked S5, S6, S7 and S8 on appropriate sides.

Original bearing trees:

- A Ponderosa Pine, 41 ins. dia., bears S. 36° E., at 50.9 ft. dist., mkd. scribe healed over.
- A partially rotted down Pine, 10 ft. in length, size indeterminate, bears N. 57° W., at 45.0 ft. dist., mkd. S6 BT, the rest of the scribe has rotted away.
- A 24" dia. down Western Larch, bears N. 81° E., at 35.0 ft. dist. mkd. scribe side of the tree is face down.

At the time of remonumentation the 41 in. dia. Ponderosa Pine was in good healthy shape.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2½" x 30" alum. pipe with a 2½" alum. cap 22 ins. into the ground. Constructed a 36 ins. dia. stone mound around the monument. The cap is marked as shown in the corner diagram. Buried the original corner stone 1 ft. to the North of the new monument. From the corner point:

- A Ponderosa Pine, 14 ins. dia., bears N. 60° E., at 22.9 ft. dist., mkd. T7S R43E S5 BT.
- A Douglas Fir, 7 ins. dia., bears N. 27° W., at 21.9 ft. dist., mkd. T7S R43E S6 BT.
- A Western Larch, 8 ins. dia., bears S. 75° W., at 4.1 ft. dist., mkd. T7S R43E S7 BT.


Set a steel fence post 4 ft. South of the monument and attached a USFS 54-9 sign. Painted the face of the blaze and a 6 in. red band around the bearing trees. I.D. washers were nailed between the scribed B and T of the new bearing trees. The washers are ¾" in diameter and made of brass with PLS 1206 stamped on one side. Attached USFS 54-9 and 54-3 signs to bearing trees. Used 18½° declination on a staff compass for readings to the bearing trees. Used a steel tape to measure to a nail set in the side of the trees.

This corner was set from the average bearings and distances from the found bearing trees. No two bearings or distances intersected at a reasonable spot.

This corner was remonumented to USFS specifications on December 9, 1986, witnessed by Tom Fisk and Larry McBroom.

Office of..... County Surveyor..... County of..... Baker.....
 State of..... OR....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)



James D. Hanley
 OREGON
 SEPTEMBER 21, 1977
 JAMES D. HANLEY
 1206

★ GPO—798-276

FILED 10/18/88
 BAKER COUNTY SURVEYOR
 SURVEY NO. 7-43-145