


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

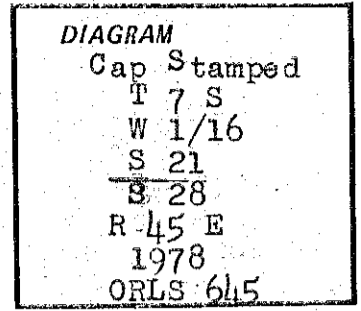

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2 1/2" x 30" galv. iron pipe w/brasscap stamped as shown above in the ground in mound of stone.

New bearing trees:

1 1/4" larch bears N 59 W, 126.83 ft. scribed 1/16 S S 21 BT.
9" fir bears S 70 W, 116.25 ft. scribed 1/16 S S 28 BT.

I hereby certify the above corner monument was re-established as herein described in August 1978.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Witnesses:

Leonard E. Green
Crew Chief

L. D. [Signature]
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)