


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

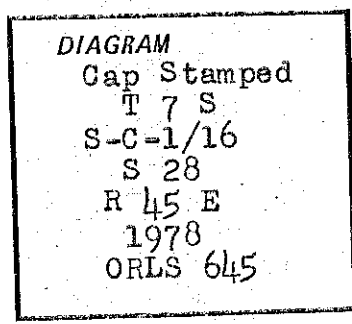

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2 1/2" x 30" galv. iron pipe w/brass cap stamped as shown above in the ground in mound of stone.

New bearing trees:

9" fir bears N 11 E, 15.75 ft. scribed 1/16 S 28 BT.
10" fir bears S 63 W, 42.0 ft. scribed 1/16 S 28 BT.

I hereby certify the above corner monument was re-established as herein described in August 1978.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON JULY 10, 1964 JAMES H. HAMBLETON 645
--

Witnesses:

Leonard E. Stevens
Crew Chief

L. D. Shelby
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED 9-26-78
BAKER COUNTY SURVEYOR
SURVEY NO. 7-45-34