


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No previous history.

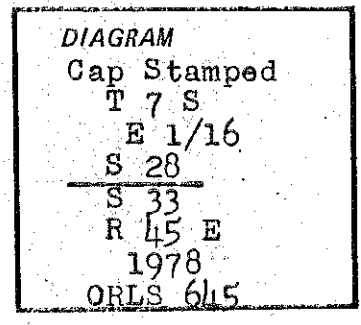

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

I set a 2 1/2" x 30" galv. iron pipe w/brass cap stamped as shown above in the ground with a large mound of stone around the monument.

New bearing trees:

11" pine bears N 06 W, 68.30 ft. scribed 1/16 S 28 BT.
9" pine bears S 71 E, 75.0 ft. scribed 1/16 S 33 BT.

I hereby certify the above corner monument was re-established as herein described in August 1978.

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Hambleton
8-21-78

OREGON
JULY 10, 1964
JAMES H. HAMBLETON
645

Witnesses: *Leonard E. Green*
Crew Chief

L. D. Shaly
Instrument Man

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)