


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by W. Barr in 1881, set basalt rock 12"x12"x8" in rock mound.

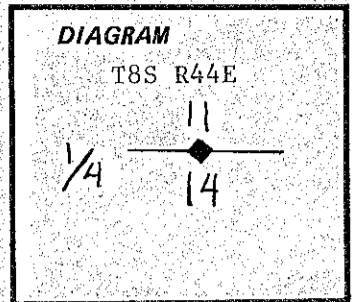


Description of corner evidence found:

Now falls in field, No trace remains to be found.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportion position I set a 2"x30" aluminum pipe with 3 1/4" aluminum cap set 14" below ground surface, and following: 5/8" iron rod with aluminum cap S80°42'W, 354.13 feet, driven at the South edge of a large firmly planted boulder rock, said rock being 3'x4'x10" high. Set 6' steel post with signs 54-3, & 54-9, 0.5 feet from the iron rod.

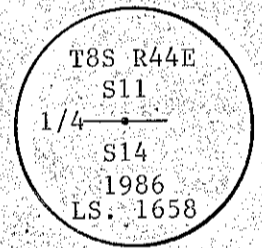

Witness by: R. J. Schulson  
B. Haynes



Office of..... County of Baker  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

FILED July 31, 1986  
BAKER COUNTY SURVEYOR  
SURVEY NO. 8-4A-131