


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner was originally established by W. B. Barr under Contract 503 in July, 1884. The original notes state that a volcanic rock 16" x 9" x 7" x 7" marked 1/4 S was set from which:

- A Fir 4" in diameter bears S 80° W 47 LK marked 1/4 S BT.
- A Fir 20" in diameter bears N 84° E 17 LK marked 1/4 S BT.

No record of subsequent re-monumentation found in County Records.

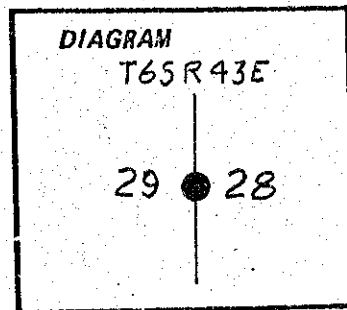

Description of corner evidence found:

Scattered mound of stones - none found with appropriate markings.


A 30"+ Fir stump with healed blaze bears N 84° E 17 LK (11.22 feet) the log of the 30"+ stump bears S 30° E for 26 feet + (downhill) from the stump with visible scribing 1/4 S - -. Re-established corner S 84° W 17 LK (11.22 feet) from found BT stump.

Description of monument and accessories I established to perpetuate the

original location of this corner: At the corner position I set a 2" x 30" iron pipe with brass cap 18" in the ground and surrounded with a mound of stones to within 4" of cap marked:

From which:

- A 12" Ponderosa Pine bears N 6 1/2° E for 17.8 feet, scribed 1/4 S28 BT.
- A 23" Red Fir bears N 84 1/2° W for 75.3 feet, scribed 1/4 S29 BT.
- New BT's have a lower blaze scribed BT with a brass washer stamped PLS 1106 nailed flush. Attached sign 54-3 and painted red ring around new BT's.
- Attached sign 54-3 to original BT stump and log.
- Set a steel fence post with sign 54-4 attached by monument.

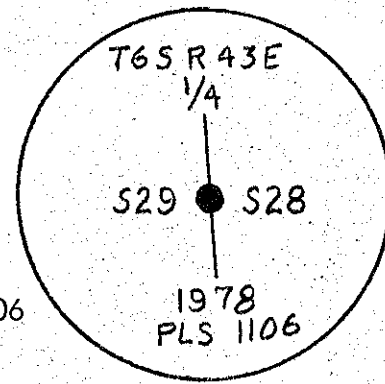

Witness: Les Wilson

Used magnetic compass with 20 1/2° E declination and measured to center of root crown on BT's with steel tape.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

11-1-78

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of..... 19.....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

GPO-798,276

FILED Nov. 3, 1978

BAKER COUNTY SURVEYOR

SURVEY NO. 6-43-18