


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: Corner was originally established by W. B. Barr under Contract No. 503 in July, 1884. The original notes call for a 12" x 12" x 6" x 8" sandstone for the corner from which:

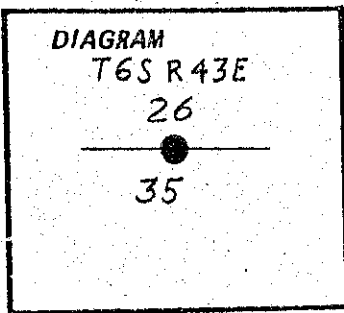

- A 30" pine bears S 35° W 86LK marked 1/4 S.BT.
- A 24" pine bears N 35° W 175 LK marked 1/4 S.BT.

No record of subsequent re-monumentation found in County Records.

Description of corner evidence found:

Found a 10" x 10" x 5" sandstone with "X" from which:

- A 38" Ponderosa Pine bears S 35° W for 55.0 feet with healed blaze.
- A 43" Ponderosa Pine stump bears N 35° W for 115.5 feet with no evidence of blaze

Note: The 38" Ponderosa Pine was a school marm tree before one of the forks was cut off.


Description of monument and accessories I established to perpetuate the original location of this corner: At the corner position I set a 2" x 30" iron pipe with brass cap 18 inches in the ground and surrounded with mound of earth marked:

- Buried sandstone monument underground next to new monument.
- Set steel fence post with sign 54-4 attached next to new monument.

Set 1 new BT: A 15 1/2" Ponderosa Pine bears N 73° W for 35.5 feet, scribed 1/4 S26 BT.

The new BT has a lower blaze scribed BT with a brass washer stamped PLS 1106 nailed flush.

- Attached signs 54-3 to existing 43" BT stump, existing 38" BT and new BT.
- Painted red ring around existing 38" BT and new BT.

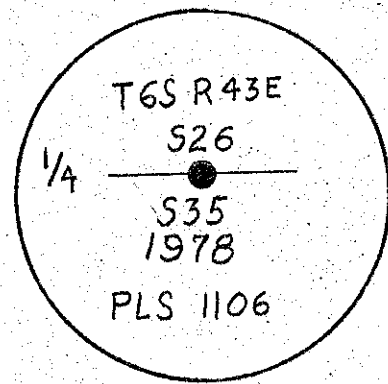

Witness: Les Wilson

Used magnetic compass with 20 1/2° E declination and measured to senter of root crown on BT's with steel tape.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

11-1-78

Office of..... County of.....

State of..... I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by.....
(COUNTY OFFICIAL) (DEPUTY)

FILED Nov. 3, 1978
BAKER COUNTY SURVEYOR
SURVEY NO. 6-43-21