


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

No record of corner being established in County Surveyors Office.

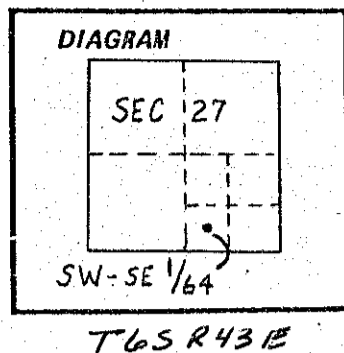

Description of corner evidence found:

None.

*A 4" x 4" white wood post bears N 75 1/2° W for 57.6 feet set by persons unknown.

Description of monument and accessories I established to perpetuate the original location of this corner. At the corner position I set a 2" x 30" iron pipe with brass cap marked:

This monument falls in a soft rock outcrop. Set monument 6" in ground with mound of stone to within 12" of cap from which:


A 14" Ponderosa Pine bears N 20 1/2° E for 45.4 feet, scribed SW-SE 1/64 S27 BT.

A 9" Ponderosa Pine bears N 45° W for 14.6 feet, scribed SW-SE 1/64 S27 BT.

Both BT's have a lower blaze scribed BT with a brass washer stamped PLS 1106 nailed flush. Attached signs 54-3 and painted a red ring around each BT. Set a steel fence post on property line by monument and attached signs 54-2 and 54-9.

Witness: Les Wilson

Used magnetic compass with 20 1/2° E declination and measured to center of root crown on BT's with steel tape.

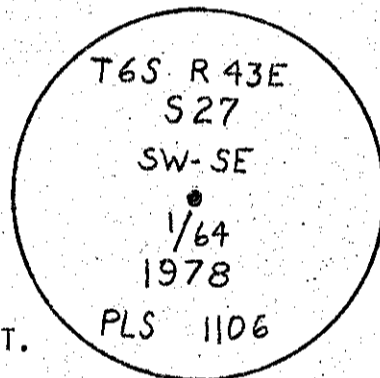

REGISTERED PROFESSIONAL LAND SURVEYOR

William R. Wells

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106

11-1-78

Office of..... County of..... State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

FILED Nov. 3, 1978 BAKER COUNTY SURVEYOR SURVEY NO. 6-43-30