


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner established by RPE 2808 in OCTOBER 1972
 (1/2" iron pin with plastic cap stamped RPE 2808)

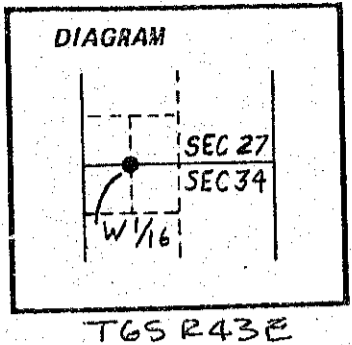

Description of corner evidence found:

1/2" iron pin with plastic cap marked RPE 2808.
 The pin bears N 61° 26' W for 1.12 feet from our calculated position.

Description of monument and accessories I established to perpetuate the original location of this corner. At the position of the 1/2" iron pin I set a 2" x 30" iron pipe with brass cap marked:
 Set monument 24" in ground with mound of stone to top. Buried 1/2" iron pin underground next to monument.

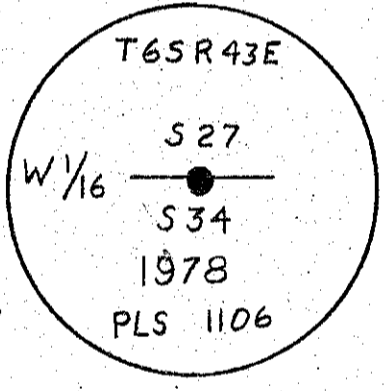

A 13" White Fir bears N 86° W for 11.2 feet, scribed W 1/16 S27 BT.
 An 18" White Fir bears S 75° E for 97.5 feet, scribed W 1/16 S34 BT.
 Both BT's have a lower blaze scribed BT with a brass washer stamped PLS 1106 nailed flush. Attached signs 54-3 and painted a red ring around each BT.
 Set a steel fence post on property line by monument and attached signs 54-2 and 54-9.

Witness: Les Wilson

Used magnetic compass with 20 1/2° E declination and measured to center of root crown on BT's with steel tape.

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

William R. Wells

OREGON
 JULY 22, 1977
 WILLIAM R. WELLS
 1106

11-1-78

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of..... 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

* GPO - 798-276
 FILED Nov. 3, 1978
 BAKER COUNTY SURVEYOR
 SURVEY NO. 6-43-36