


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by RPE 2808 in OCTOBER 1972
(1/2" iron pin with plastic cap marked RPE 2808)

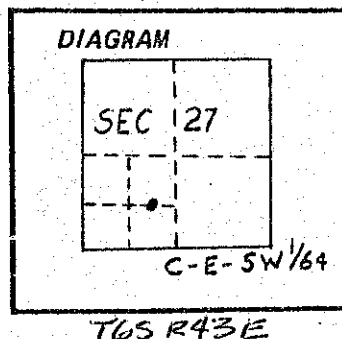


Description of corner evidence found:

None.

*Note: A 1/2" iron pin with plastic cap stamped RPE 2808 bears S 60° 18' E - 4.68 FT from our calculated position.

Description of monument and accessories I established to perpetuate the original location of this corner. Set 2" x 30" iron pipe with brass cap marked: Set monument 18" in ground and surrounded with mound of earth and a few stones from which:

A 13" Red Fir bears N 60° W for 7.9 feet, scribed C-E-SW 1/64 S27 BT.
 An 11" Red Fir bears S 87½° E for 23.1 feet, scribed C-E-SW 1/64 S27 BT.
 Both BT's have a lower blaze scribed BT with a brass washer stamped PLS 1106 nailed flush. Attached signs 54-3 and painted a red ring around each BT.
 Set a steel fence post on property line by monument and attached signs 54-2 and 54-9.

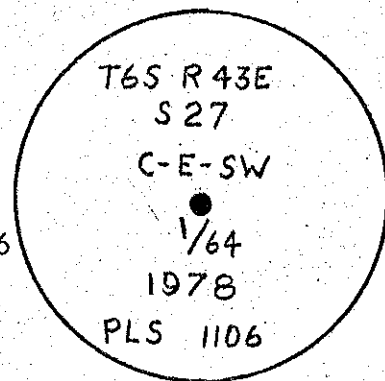

Witness: Les Wilson

Used magnetic compass with 20½° E declination and measured to center of root crown on BT's with steel tape.

SET MONUMENT AT OUR CALCULATED POSITION

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

11-1-78

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

FILED Nov. 3, 1978
 BAKER COUNTY SURVEYOR
 SURVEY NO. 6-43-37