


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by W. B. Barr under contract dated June 14, 1880.

Surveyor's General record states:

Set stake 4 ft. long, 4 inches in diam., 18 inches in ground for 1/4 Sec. corner. Raised mound of rock as per instructions.

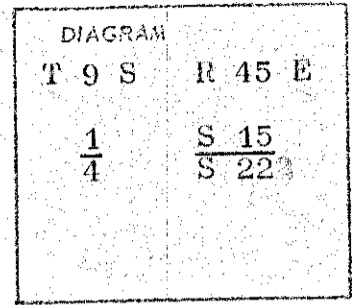

Description of corner evidence found:

Found none.

Description of monument and accessories established to perpetuate the original location of this corner

Set an auto axle 1 inch diam., 24 inches long, 8 inches beneath the surface of County Road Feb. 19, 1975.

Monument marked thus:

T 9 S R 45 E
 $\frac{1}{4}$ $\frac{S 15}{S 22}$
 CS 1975

Office of Baker County Surveyor, County of Baker
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the _____ day of _____
 _____ by _____
 (COUNTY OFFICIAL) (DEPUTY)

FILED 3-3-75
 BAKER COUNTY SURVEYOR
 SURVEY NO. 9-45-15

