


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 355, dated June 14, 1880

Surveyor General record states;

Marked basalt rock 16x10x8 for corner to Sec 7x8x17x18 raised mound of rock as per instructions

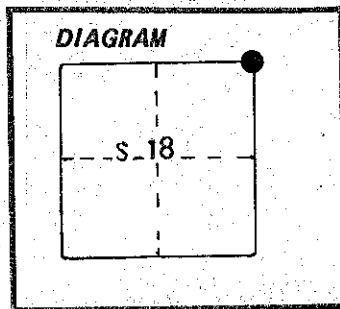

Description of corner evidence found:


Found well marked stone in rockjack

Description of monument and accessories I established to perpetuate the original location of this corner:

At the South edge of rock jack, I set a 1 1/2" x 36" iron pipe with brass cap marked as shown, 31 inches in the ground

Buried stone South and alongside of pipe

No corner accessories available

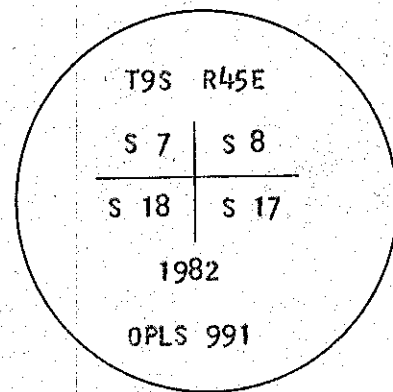

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED APRIL 28, 1982  
BAKER COUNTY SURVEYOR  
SURVEY NO. 9-45-28