


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

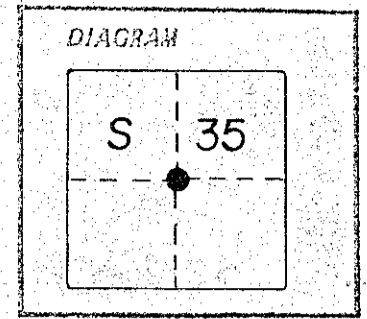

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner position I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground from which:

NEW BTs

- A 22 in diam red fir bears N62°E, 18.4 feet marked C 1/4 S35 BT
- A 12 in diam red fir bears N43°W, 57.6 feet marked C 1/4 S35 BT


Raised mound of stone around monument

Set steel fence post approximately 5 feet Easterly with 54-2 sign and approximately 5 feet Westerly with 54-2 and 54-9 sign attached

Corner set October 10, 1982

Witnesses: Greg Blackman, Rick Robinson and Ray Crope

See survey dated December, 1982

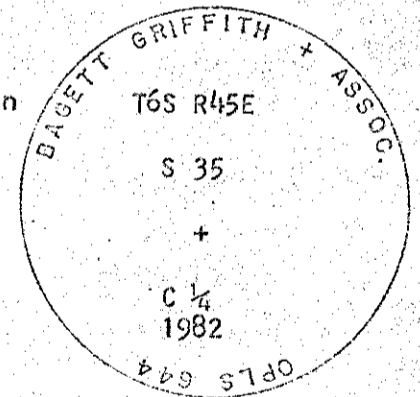

REGISTERED PROFESSIONAL LAND SURVEYOR

I hereby certify this corner was re-established as hereon described on the date written above

Handwritten signature of Duane I. Griffith

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL) by (DEPUTY)

FILED Sept 16, 1983
BAKER COUNTY SURVEYOR
SURVEY NO. 6-45-41

30 ✓