


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner originally established by W.B. Barr under GLO contract No. 503, dated May 23, 1884. Surveyor General record states;

A fir 5 in diam for 1/4 sec corner marked 1/4 S on the N side from which;

A fir 6 in diam bears N43°E 25 lks dist marked 1/4 S BT  
A fir 3 in diam bears S40°E 75 lks dist marked 1/4 S BT



Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the original location of this corner:


At proportionate distance I set a 2 1/2"x30" iron pipe with brass cap marked as shown 28 inches in the ground from which:

A 14 in diam alpine fir bears N21°E, 49.0 feet marked 1/4 S14 BT  
A 12 in diam alpine fir bears East, 15.2 feet marked 1/4 S23 BT

Raised mound of stone around monument  
Set steel fence post approximately 5 feet Westerly with 54-4 sign attached

Corner set September 1, 1982  
Witnesses: Rick Robinson, Ray Crapo and Russ Hiatt

See survey dated December, 1982

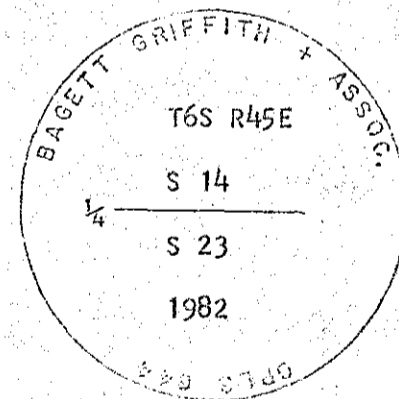

I hereby certify this corner was re-established as hereon described on the date written above

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*  
OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

Office of..... County of.....  
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form RG-7100-57 (9/71)

FILED Sept 16 1983  
BAKER COUNTY SURVEYOR  
SURVEY NO. 6-45-73

6300-71-171

63 ✓