


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
Corner not previously established

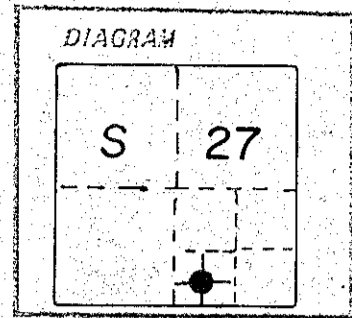

Description of corner evidence found:

NONE

Description of monument and accessories established to perpetuate the original location of this corner:


The position of the SW-SE 1/64 is too steep to set a monument of any permanent type I therefore set a 2 1/2'x30" iron pipe with brass cap marked as shown, 24 inches in the ground for Witness Corner. (N89°12'49"W, 9.42 feet from true corner position)

WITNESS CORNER BTs

- A 11 in diam white fir bears S10°E 18.7 feet marked X BT
- A 18 in diam spruce bears N82°W 43.5 feet marked X BT
- Raised mound of stone around witness corner

Set steel fence post approximately 5 feet Northerly of true corner position with 54-2 sign and approximately 5 feet Westerly of true corner position with 54-2 and 54-9 signs attached
Corner set October 4, 1982

Witnesses: Greg Blackman and Ray Crapo
See survey dated December, 1982

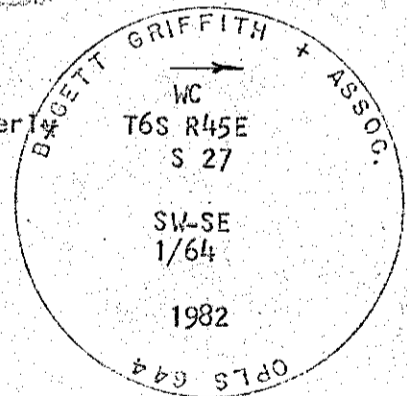

REGISTERED
PROFESSIONAL
LAND SURVEYOR

I hereby certify this corner was re-established as hereon described on the date written above

OREGON
JULY 10, 1954
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

FILED Sept 16 1983
BAKER COUNTY SURVEYOR
SURVEY NO. 6-45-110

(101) ✓