


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Henry W. Cooke, Mineral Survey Number 6, dated October 28, 1886. Official record states:

Set a post 4 1/2 feet long 4 ins square 12 inches in ground marked COR NO 4 APNC SUR NO 6 and raised mound of stone around post



Description of corner evidence found:

Corner position was determined from Survey number 6-45-13 by William L. Hanley

Description of monument and accessories I established to perpetuate the original location of this corner:

Corner position falls in tailing pile and is in danger of being obliterated! I therefore set a witness corner N16°55'03"E, 187.64 feet from the true corner position. I set a 2 1/2"x30" aluminum pipe with aluminum cap marked as shown, 26 inches in the ground from which:

WITNESS CORNER BTs

- A 18 in diam tamarack bears N55°E, 6.0 feet marked X BT
- A 10 in diam spruce bears S55°W, 8.2 feet marked X BT

Raised mound of stone around monument  
Set steel fence post approximately 5 feet Northerly with 54-2 sign and approximately 5 feet Southerly with 54-2 and 54-4 sign attached

Corner set October 10, 1982

Witnesses: Greg Blackman, Rick Robinson and Ray Crapo  
See survey dated December, 1982


REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON JULY 10, 1984 DUANE I. GRIFFITH 644

I hereby certify this corner was re-established as hereon described on the date written above

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

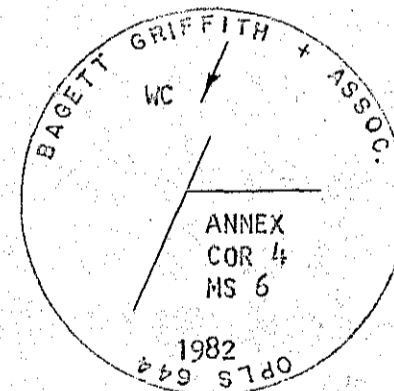

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED Sept 16 1983  
BAKER COUNTY SURVEYOR  
SURVEY NO. 6-45-113

720-276

104 ✓