




Land Surveying & Boundary Consulting

32610 Mountain Lakes Drive  
Klamath Falls, OR 97601  
(541) 356-2381

**CERTIFIED RECORD OF LAND  
CORNER MONUMENTATION**

45° 01' 34.613" N  
117° 11' 13.369" W  
+/- 5 Meters.  
NAD 83

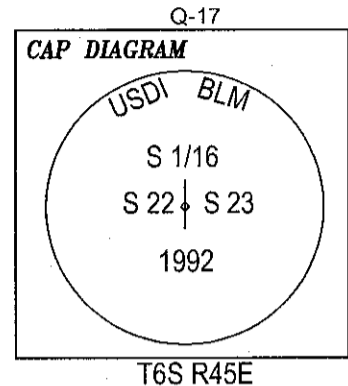

**History of original corner establishment:**

**Philip Griffin, Cadastral Surveyor, 1994**

Set: A stainless steel post, 28 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, in a mound of stone, 4 ft. base to top, with brass cap from which:

A spruce, 16 ins. diam., bears N 19 1/4° E 86 lks. (56.8 ft.) marked S 1/16 S23 BT.

A spruce, 20 ins. diam., bears N 6° W 73 lks. (48.2 ft.) marked S 1/16 S22 BT.

Deposit a white "deep-1" magnetic marker at base of stainless steel post.

**Description of corner evidence found:**

*Monument Found:*

A stainless steel post, 2 1/2 ins. diam., with a 3 1/4 in. brass cap showing 6 ins. above ground firmly set. A stone mound 4 ft. base to top surrounds the cap.

*Accessories Found:*

A spruce, 18 ins. diam., bears N 21° E 57.5 ft. marked S 1/16 S23 BT on an open single blaze. This tree is alive and healthy. (Record N 19 1/4° E 56.8 ft.) (Griffin)

A spruce, 22 ins. diam., bears N 4° W 48.2 ft. marked S 1/16 S22 BT on an open single blaze. The tree is alive and healthy. (Record N 6° W) (Griffin)

**Description of monument and accessories established to perpetuate corner:**

*Monument Set:*

None

*Accessories Set:*

A 5/8 x 30 in. rebar with 2 in. aluminum cap set 20 ins. in the ground bears S 20° E 5.6 ft.

A 5/8 x 30 in. rebar with 2 in. aluminum cap set 24 ins. in the ground bears S 71° W 7.3 ft.

An aluminum post with land survey monument sign bears N 50° E 5.4 ft.



Equipment: Warren Knight staff compass with tripod, Var. 15 1/2° E,

Keson tape, clinometer, loggers tape

Crew: Richard Chesebro & Ron Grace

Date: August 7, 2008

Office of.....County Surveyor..... County of.....Baker.....

State of.....Oregon....., I hereby certify that the within was filed  
in this office for record on the..... day of....., 20.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

1/9/09  
REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

Richard Chesebro  
OREGON  
JULY 18, 1980  
Richard A. Chesebro  
1886  
Renews: 12-31-2009

FILED JAN. 14, 2009  
BAKER COUNTY SURVEYOR  
SURVEY NO. 6-45-162