


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
 Corner originally established by W.B. Barr under GLO contract No. 503, dated May 23, 1884. Surveyor General record states;

A fir 6 inches in diam for 1/4 sec cor marked 1/4 S on the W side from which;

A tamarack 6 in diam bears S87°W 8 lks dist marked 1/4 S BT
 A black pine 10 in diam bears N20°E 11 lks dist marked 1/4 S BT



Description of corner evidence found:

Found Southwest BT, now a 22 in diam tamarack, opened and found scribes.

Description of monument and accessories I established to perpetuate the original location of this corner:

At record bearing and distance from the found BT, I set a 2 1/2"x30" Iron pipe with brass cap marked as shown 28 inches in the ground from which:

NEW BTs

A 24 in diam tamarack bears S26°E 47.6 feet marked 1/4 S30 BT
 A 18 in diam red fir bears S54°W 23.2 feet marked 1/4 S25 BT


Set steel fence post approximately 5 feet Northerly with 54-4 sign attached

Corner set August 12, 1982

Witness: Greg Blackman and Rick Robinson

See survey dated December, 1982

I hereby certify this corner was re-established as hereon described on the date written above

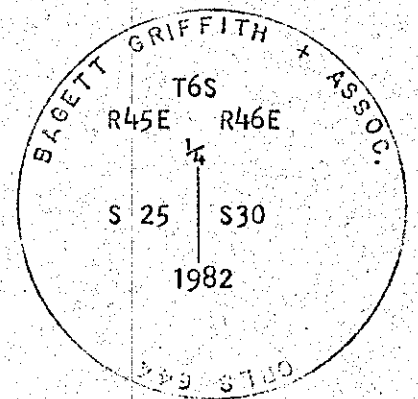

REGISTERED PROFESSIONAL LAND SURVEYOR

Handwritten signature of Duane I. Griffith

OREGON
 JULY 19, 1964
DUANE I. GRIFFITH
 644

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze of new BTs.

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED Sept 16, 1983
 BAKER COUNTY SURVEYOR
 SURVEY NO. 6-45-55
6-46-2

44