

ELLINGSON LUMBER COMPANY

Manufacturers and Wholesalers Since 1890

Ponderosa Pine — Douglas and White Fir

John Day, Oregon

August 29, 1963

Mr. James R. Hanley
County Surveyor, Baker County
Baker County Courthouse
Baker, Oregon

Dear Sir:

During logging operations on a Bureau of Land Management timber sale in the Halfway, Oregon, area, the two bearing trees for the one-quarter corner on the west line of Section 18, Township 6 South, Range 47 East of the Willamette Meridian, were destroyed.

The marked rock, as indicated in the original field notes, has not been disturbed.

I have established and scribed two additional bearing trees for this corner, as follows:

A White fir tree, nine inches in diameter, bears South 81 degrees, 00 minutes West, at a distance of 66 links, marked $\frac{1}{4}$


S13
T6S
R47E
BT

A Douglas fir tree, twenty-three inches in diameter, bears South 23 degrees, 30 minutes East, at a distance of 1.00 chains, and is marked $\frac{1}{4}$

S18
T6S
R48E
BT

Very truly yours,

ELLINGSON LUMBER COMPANY

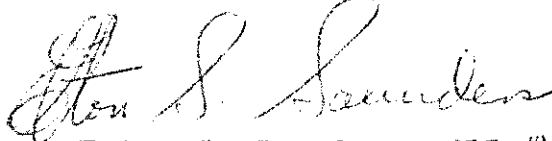

Elton S. Saunders, OLS #405
Forester

cc: Bureau of Land Management
Baker, Oregon

FILED *[initials]*
BAKER COUNTY SURVEYOR
AUG 30 1963