

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Timothy W. Davenport under GLO contract number 102, dated July 20, 1863. Surveyor General records states:

Set post corner to Secs 3,4,33 and 34 made mound of rock.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found no evidence of the GLO Corner monument or accessories.

See Survey dated May 20, 2002 for Wes Williams

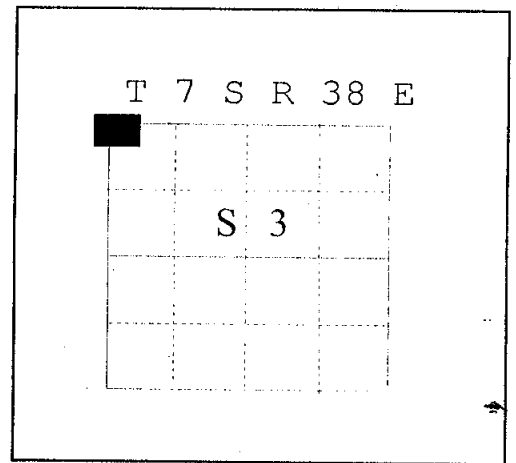

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the intersection of the Southerly prolongation of the center line of the County Road, and the mean of the existing fence lines to the East, I set a 2 1/2" brass cap on a 5/8" x 30" "Copper Clad" iron pin, 36" in the ground (6" below the road surface) marked as shown below, from which;

NEW BEARING OBJECTS:

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NE RP" bears North 40°02' East, a distance of 52.94 feet. (In N-S Fence)


A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SE RP" bears South 61°43' East, a distance of 48.64 feet. (In N-S Fence)

A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER SW RP" bears South 29°38' West, a distance of 40.35 feet. (In N-S Fence)


A 5/8"x30" iron pin with 1 1/2" aluminum cap marked "BGB SURVEY MARKER NW RP" bears North 36°45' West, a distance of 54.48 feet. (In N-S-W Fence corner)

I hereby certify that the corner was monumented on May 16, 2002.

Witness: Greg T. Blackman Jr.

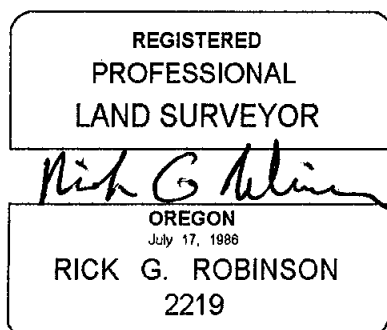

Renewal Date December 31, 2002

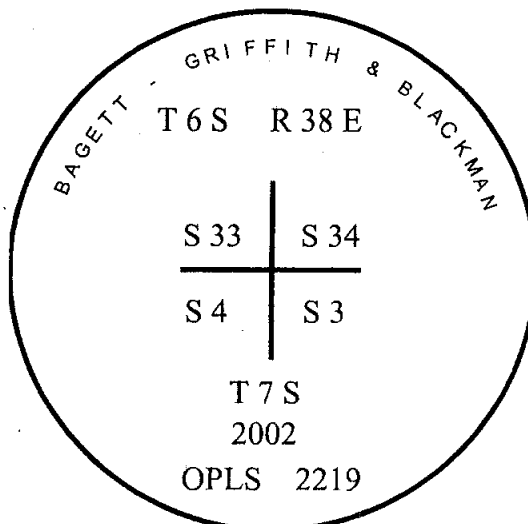

I used a Leica 530 GPS system with the Basis of Bearing being the same as Survey dated May 20, 2002 for Wes Williams in establishment of the new accessories. The distances are to the center of cap.

FILED MAY 22, 2002

BAKER COUNTY SURVEYOR

A-13

SURVEY NO. 6-38-23

7-38-76

CP # 79