


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner originally established by David Thompson and Daniel Chaplin under GLO Contract Number 104, dated April 16th, 1864. Surveyor General Field Notes state:

Set post for 1/4 sec. cor. in mound of earth with charred stake, pits, trench, as per instructions.

T 7 S R 39 E J-15



DESCRIPTION OF CORNER EVIDENCE FOUND:


None. Falls in a cultivated field.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position, I set a 5/8" x 30" iron pin, 60" in the ground, with 2 1/2" aluminum cap marked as shown below, from which:

NEW BEARING OBJECTS:

- A 5/8" x 30" iron pin bears North 84°54' East, a distance of 105.22 feet with 1 1/2" aluminum cap marked NE RP BGB SURVEY MARKER.
- A 5/8" x 30" iron pin bears South 37°15' East, a distance of 96.13 feet with 1 1/2" aluminum cap marked SE RP BGB SURVEY MARKER.
- A 5/8" x 30" iron pin bears South 53°04' West, a distance of 16.14 feet with 1 1/2" aluminum cap marked SW RP BGB SURVEY MARKER.
- A 5/8" x 30" iron pin bears North 26°49' West, a distance of 11.49 feet with 1 1/2" aluminum cap marked NW RP BGB SURVEY MARKER.

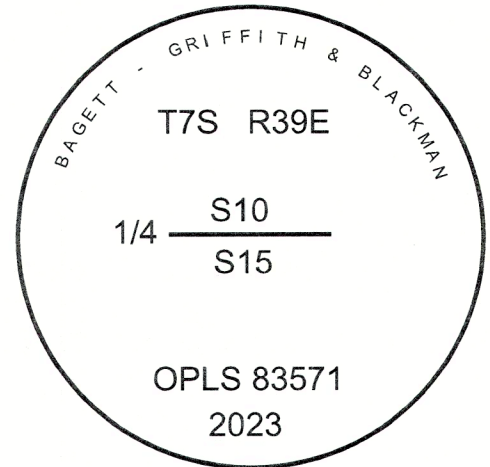

I hereby certify that the corner was monumented on May 26, 2023.
Witness: Kyle Tucker



Renewal Date: June 30, 2025

I used a Leica GS18 with RTK in the establishment of the new accessories. Bearings and distances are measured to the center of the aluminum caps. Basis of bearing is as per Survey filed concurrently.

J-15

FILED July 19, 2023
BAKER COUNTY SURVEYOR
SURVEY NO. 7-39-112