


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract number 503, dated August 9, 1884. Surveyor General record states: Set post 4 ft long 4 ins diam 24 ins in ground for cor to secs 21, 22, 27 and 28, from which:
 A pine 20 ins diam bears N45°E, 19 lks dist marked T7S R44E S22 BT
 A fir 8 ins diam bears S62°E, 30 lks dist marked T7S R44E S27 BT
 A pine 22 ins diam bears S32°W, 47 lks dist marked T7S R44E S28 BT
 A pine 25 ins diam bears N34°W, 60 lks dist marked T7S R44E S21 BT
 Corner remonumented at proportionate position in 1984 by Barry B. Barbour, OPLS 1051. His record states:
 Found no trace of record post or bearing trees. The area has been logged. At surveyed point set 2½"x30" aluminum pipe and cap marked: (markings shown below). Set pipe 22" in the ground and mound of stone around to cap. From which by magnetic declination of N20°E: A 12" Pine bears N9°E, 15.5 feet scribed T7S R44E S22 BT. A 16" Fir bears S57°E, 84.0 ft. scribed T7S R44E S27 BT. An 18" Pine bears S50°W, 101.8 ft. scribed T7S R44E S28 BT. A 16" Pine bears N53°W, 59.6 ft. scribed T7S R44E S21 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s and brass washers stamped PLS 1051 on the bearing trees. Placed a 54-4 on a steel fencepost 5' North of the corner.
 No record of subsequent monumentation found in Baker County survey records.

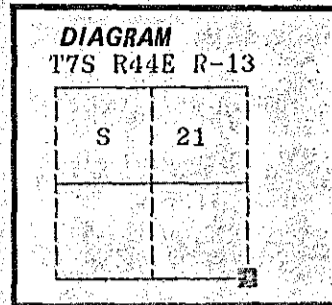

Description of corner evidence found:

Found aluminum monument erroneously set by Mr. Barbour at proportionate position. Found corner accessories established by Barbour as described above. Monument is marked as shown:

T7S R44E
 S 21 | S 22

 S 28 | S 27
 OR PLS 1051
 1984

At a point approximately 100 feet South and 220 feet West of the Barbour monument, I found evidence of the original corner established by Mr. Barr.
 Found no evidence of the original corner post.
 Found a 20 inch diameter Ponderosa Pine stump N45°E, 19 lks, with BT scribes visible.
 Found a 22 inch diameter Douglas Fir stump S62°E, 30 lks with blaze evident. I opened and found T scribe visible.
 Found a 22 inch diameter Ponderosa Pine snag S32°W, 47 lks. Tree has been raked by log, with no scribes visible.
 Found no evidence of the original Northwest bearing tree.

Distances to the original bearing trees are to the face of the blaze.

Description of monument and accessories I established to perpetuate the

original location of this corner: At record bearing and distance from the found original bearing trees, I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which:


New BTs:
 A 24 inch diameter Douglas Fir bears N11°E, 62.84 feet marked T7S R44E S22 BT
 A 9 inch diameter Western Larch bears S65°E, 28.02 feet marked T7S R44E S27 BT
 A 14 inch diameter White Fir bears S21°W, 19.25 feet marked T7S R44E S28 BT
 A 10 inch diameter Ponderosa Pine bears N38°W, 11.60 feet marked T7S R44E S21 BT

Painted a 6 inch red band around all BTs and attached bearing tree and land survey monument signs.

Set a steel fencepost approximately 5 feet North with land survey monument sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on September 26, 1988.

Witness: Rick Robinson

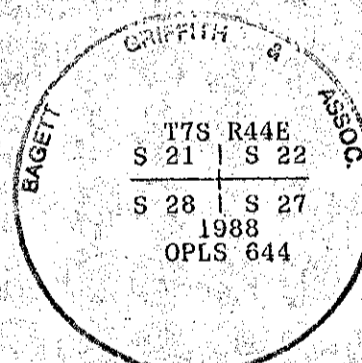

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Duane I. Griffith
 OREGON
 JULY 10, 1964
DUANE I. GRIFFITH
 644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19....
 by
 (COUNTY OFFICIAL) (DEPUTY)

FILED 11-16-88
 BAKER COUNTY SURVEYOR
 SURVEY NO. 7-44-225