

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by W. B. Barr under GLO contract no. 443 dated May 29, 1882.

Surveyor General records state:

Set granite boulder 12 x 10 x 10, 8 inches in ground for corner to Sec 25, 26, 35, 36 marked with 1 notch on East and 1 notch on the South edges from which:

- A pine 5 in. diam bears N 57° E, 46 lks dist marked T 7 S R 45 E S 25 BT
- A pine 48 in. diam bears N 89° W, 302 lks dist marked T 7 S R 45 E S 26 BT
- A pine 40 in. diam bears S 87° W, 300 lks dist marked T 7 S R 45 E S 35 BT
- A pine 46 in. diam bears S 21° E, 10 lks dist marked T 7 S R 45 E S 36 BT

Description of corner evidence found:


Original corner monument not found.

Corner monument re-established at extended intersection of ancient fences running west and north. This position identified by Mr. Ladd Steele, landowner, as being his recollection of original corner location on Nov. 19, 1974, to Bill Hanley and Brad Gordon.


Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2½ inch brass cap on a 1 inch iron pipe 31 inches long and 5 inches below road surface.

Brass cap marked thus: T 7 S R 45 E



I hereby certify that the above described corner monument was properly established on Feb. 20, 1980, under my supervision and witnessed by Brad Gordon, Tom Fisk, and Jim DeMastus.

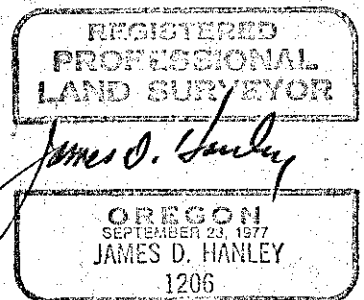

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED March 18, 1981
 BAKER COUNTY SURVEYOR
 SURVEY NO. 7-45-67