


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by W.B. Barr under GLO contract No. 443, dated May 29, 1882. Surveyor General record states: Set basalt rock 12x10x8 ins 8 inches in the ground for corner to Sec 2,3,10,11 marked with 5 notches on the South and 2 notches on the East edges, from which a Fir 16 in diam bears N65°E 31 lks dist marked T7SR45ES2BT a Fir 10 in diam bears N87°W 50 lks dist marked T7SR45ES3BT a Fir 9 ins diam bears S35°W 32 lks dist marked T7SR45ES10BT a Fir 4 ins diam bears S12°E 23 lks dist marked T7SR45ES11BT. Corner remonumented by

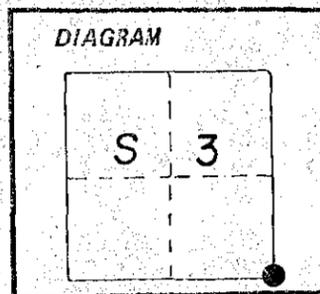

A. Joseph Garrison for the BLM under U.S. Survey/Group No. 350 dated June 16, 1975. Official record states in part: Found marked stone, firmly set. Found remains of Northeast and Northwest BTs. At corner point set iron post with brass cap from which: A pine 32 ins diam bears N39¼°E 151 lks dist marked T7S R45E S2 BT A pine 25 ins diam bears S81½°E 59 lks dist marked T7S R45E S11 BT, A western larch, 8 ins diam bears S53 ¾°W 126 lks dist marked T7S R45E S10 BT, a pine 28 ins diam bears N78°W 110 lks dist marked T7S R45E S3 BT Deposited stone alongside iron post

Description of corner evidence found:

Found iron post with standard BLM brass cap marked as shown below
 Found the Southeast, Southwest, AND Northwest bearing trees alive and vigorous, at record distance and bearing

Found the Northeast bearing tree dead and down

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Duane J. Griffith

OREGON
JULY 10, 1964
DUANE J. GRIFFITH
644

Description of monument and accessories I established to perpetuate the original location of this corner:

I raised a mound of stone around the above described monument, from which:

NEW BT

A 12 in diam red fir bears N4°E 49.5 feet marked T7S R45E S2 BT


Set a steel fence post approximately 5 feet North with 54-4 sign attached

Corner updated on November 19, 1981

Witnesses: Greg Blackman and Rick Robinson

I hereby certify this corner was re-established as hereon described on the date written above

I used a steel tape and magnetic compass in the establishment of accessories. I used 20° East magnetic declination, and distances to the New BT is to the center of the tree. I placed a brass washer marked OPLS 644 by the BT blaze on new BT

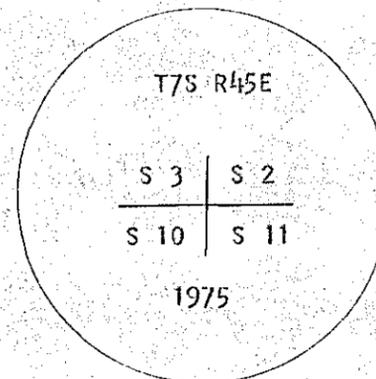

Office of..... County of.....
 State of..... I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by.....
 (COUNTY OFFICIAL) (DEPUTY)

Form RG-7100-57 (9/71)

FILED Sept 16, 1983
 BAKER COUNTY SURVEYOR
 SURVEY NO. 7-45-103

GPO-798,276

4