


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

The corner was originally established by Arthur Philbrick under Mineral Survey No. 477, during June and July 1902. The original notes state that at the corner a scribed tamarack post 4' long by 4" sq. was set 20" in the ground and surrounded with a mound of earth and stone from which:

- A 10" black pine bears S38°03'E-10.74'.
- A 12" black pine bears N56°45'E-19.56'.
- Both marked B.T.M.1-R.1-477.

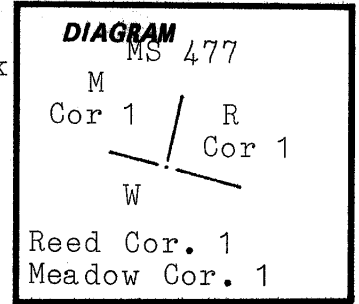

**Description of corner evidence found:**

Found the rotted remains of the post at ground level in a mound of earth and the original post lying beside the mound. From the mound:

- A 9" dead standing lodgepole pine bears S36½°E-10.9' with scribing visible on open blaze (original bearing tree).
- A 14" dead leaning lodgepole pine bears N60½°E-19.5' with scribing visible on open blaze (original bearing tree).

**Description of monument and accessories established to perpetuate the original location of this corner:**

Set a 2½" by 30" aluminum pipe with a 2½" aluminum cap 24" in the ground and surrounded with a mound of earth and stone. Placed the remains of the original post on the mound. From the monument:


- A 13" western larch bears N22°E-22.7' scribed 1-R-1-M-477 BT.
- A 6" lodgepole pine bears N53°W-9.6' scribed 1-R-1-M-477 BT.
- New bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 and 54-9 to each bearing tree and painted face of blaze and a 6" red band around each bearing tree. Set steel fence post on claim line near the corner and attached sign 54-9.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

This corner was remonumented on August 9, 1985.

Witness: John Tuttle

Cap is marked:  
MS 477

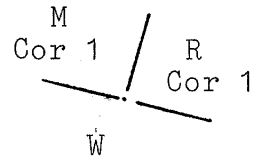

1985  
PLS 1106

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

Office of.....County Surveyor..... County of.....Baker.....  
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the...8... day of...Oct....., 1985  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)