


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally established by Arthur Philbrick under Mineral Survey No. 477, during the survey of June and July 1902. The original notes state that at the corner a scribed black pine post 4' long by 4" sq. was set 12" in the ground and surrounded with a mound of earth from which:
A 6" pine bears S61°30'W-10.13'.
A 6" pine bears S60°E-22.14'.
Both marked B.T.F.4-E.F.2-477.

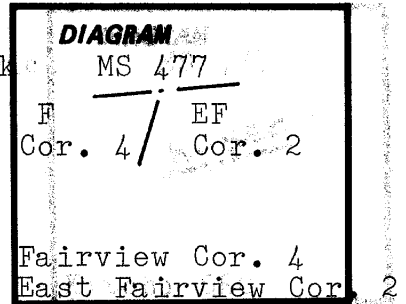

Description of corner evidence found:

Found a mound of earth and the rotted remains of the post at ground level from which:


An 8" dead standing lodgepole pine bears S60°E-22.2' with scribing visible on open blaze (original bearing tree).

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2 1/2" by 30" aluminum pipe with a 2 1/2" aluminum cap 24" in the ground and surrounded with a mound of earth and stone from which:

A 10" alpine fir bears N46 1/2°E-39.3' scribed 4-F-2-EF-477 BT.
A 9" western larch bears N14 1/2°W-34.2' scribed 4-F-2-EF-477 BT.
New bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached sign 54-3 and 54-9 to each bearing tree and painted face of blaze and a 6" red band around each bearing tree. Set steel fence post on claim line near corner and attached sign 54-9.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

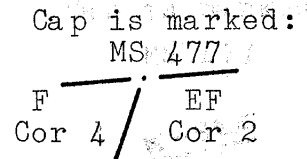

This corner was remonumented on August 28, 1985.

Witness: John Tuttle

1985
PLS 1106

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Office of County Surveyor County of Baker
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 8 day of Oct., 1985
..... by
(COUNTY OFFICIAL) (DEPUTY)