

RECORD OF LAND CORNER MONUMENTATION

CORNER #7 EUREKA CONSOLIDATED PLACER CLAIM, MINERAL SURVEY 194,
IDENTICAL WITH CORNER #3 EUREKA PLACER CLAIM, MINERAL SURVEY 194,
ALSO IDENTICAL WITH CORNER #7 HYDRAULIC PLACER CLAIM, MINERAL SURVEY 410,
SITUATED IN SECTION 32, T. 8 S., R. 37 E., W.M.
PAGE 1 OF 2


ORIGINALLY ESTABLISHED BY: Emil F. Voigt, U.S. Deputy Mineral Surveyor

MINERAL SURVEY NUMBER: 194

COMPLETION DATE: April 20, 1889

SUBSEQUENT SURVEYS:

- ▶ Mineral Survey 410 by John Hagel, U.S. Deputy Mineral Surveyor, completed October 13, 1900
- ▶ G.L.O. Retracement by Lincoln E. Wilkes, U.S. Cadastral Engineer, under Group No. 107, Approved May 26, 1927
- ▶ Unrecorded remonumentation by John R. Mitchell, an unlicensed Survey Technician, as documented on U.S. Forest Service corner card dated 9/30/1980
- ▶ Survey by Leland L. Myers, PLS #699, filed June 23, 2016 as Survey No. 8-37-136 in the Baker County Surveyor's office

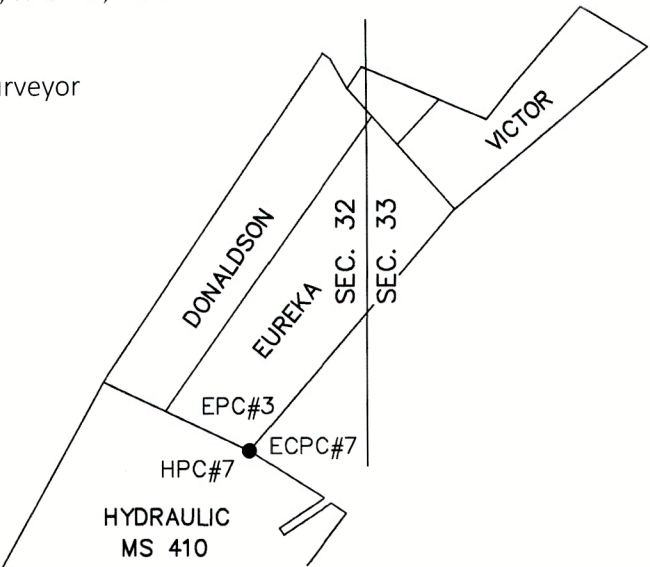

ORIGINAL DESCRIPTION: To Cor No. 7 identical with corner 3 Eureka Claim which is a black pine post 5 ft long 4 1/2" square 12" in the ground with mound of stone around it marked it Cor No. 7 ECPC S194.
a bl. pine 10" Dia blazed and marked Cor No 7 ECPCSN194 BT, bears N.17°30'E. 19L dist. (12.5 ft.)
a Tamarack 18" Dia, blazed and marked Cor No 7 ECPCSN194 BT, bears N.64°30'E. 22L dist. (14.5 ft.)

MINERAL SURVEY 410 DESCRIPTION: To Cor No. 7 Identical with a corner of the location Identical with Cor No. 7 of the Eureka Con. Placer, Sur. 194
Set a black pine post 4 ins square 4 ft. long, 12 ins in the ground, scribed C.7 E.C.P.C.S. 194 - HYDR. PL. C.7-410 with a mound of rocks around it
a black pine tree 8 ins. in diam bears S.72°30'E 33.0 ft
a red fir tree 12 ins in diam bears N.60°30'W. 27.0 ft
both blazed and scribed HYDR. PL. C.7 - 410 - B.T.

G.L.O. DESCRIPTION: Cor. No. 7, common with cor. No. 3, Eureka Placer Claim, Sur. No. 194, as described

MITCHELL'S 1980 DESCRIPTION:

DESCRIBE CORNER MONUMENT FOUND: Rotted post in Md of Stone

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND:

30" dead WL brs N64 1/2°E 22 lks w/ scribe in open blaze
30" WF brs N60 1/2°W 27' w/ scribing in opened upper blaze

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT:

Set 2 1/2" B.C. on 32" x 1" gal. pipe 24" deep in original hole marked ECPC 7 MS 194 1980

ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE:

6" WF brs N60 1/2°W 6' HDR7 MS 410 BT
7" WF brs N 7' marked EPC7 MS 194 BT


MYERS' 2016 SURVEY:

Myers found and accepted Mitchell's monument. Note next to corner on plat states: Found 1981 JRM 2 1/2" Brass Cap on 1" Galv. Pipe

FILED October 24, 2024
BAKER COUNTY SURVEYOR
SURVEY NO. 8-37-193

RECORD OF LAND CORNER MONUMENTATION

CORNER #7 EUREKA CONSOLIDATED PLACER CLAIM, MINERAL SURVEY 194,
IDENTICAL WITH CORNER #3 EUREKA PLACER CLAIM, MINERAL SURVEY 194,
ALSO IDENTICAL WITH CORNER #7 HYDRAULIC PLACER CLAIM, MINERAL SURVEY 410,
SITUATED IN SECTION 32, T. 8 S., R. 37 E., W.M.
PAGE 2 OF 2

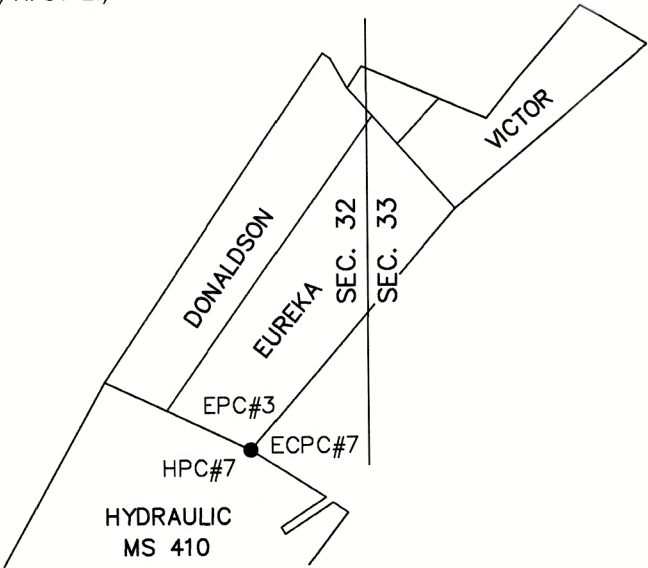


EVIDENCE FOUND: Found Mitchell's unrecorded monument, which is a 1½" galvanized iron pipe with a 2½" brass cap, marked as shown below, projecting 6" above the top of a 3 ft. diameter mound of stone.
From the found brass cap monument, I found the following bearing trees:

- ▶ A western larch snag, 20" dbh, bears N.64 ½°E., 14.5 ft. with partial scribing *R N7 ECP MSN 194* visible in an opened blaze (Voigt BT). Distance measured to the face of blaze.
- ▶ A white fir, 10" dbh, bears S.71°W., 5.7 ft., with fully-healed single blaze (Mitchell BT). Distance measured to a Mag Spike driven side-center-right at the root crown of the tree, with an attached 1½" aluminum washer stamped *PLS 69454*.
- ▶ A white fir, 29" dbh, bears N.60 ½°W., 27 ft., with partial scribing *R PL COR 7* visible in chopped-out upper blaze (Hagel BT). Distance measured to the side-center of the tree.
- ▶ A white fir, 7" dbh, bears N.05°E., 7.29 ft., with fully-healed single blaze (Mitchell BT). Distance measured to a Mag Spike driven side-center-right at the root crown of the tree, with an attached 1½" aluminum washer stamped *PLS 69454*.

I accept Mitchell's brass cap monument as a faithful and accurate perpetuation of the original corner, being harmoniously related to the original accessory evidence, and also to other found accepted mineral corners.

FOUND MONUMENT MARKED:

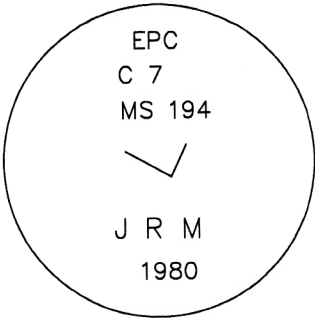

Painted a 6 inch red band around the bearing trees, and also painted the blazes red, and attached new USFS 54-3 and 54-9 signs. Used a magnetic compass with 14° East declination to measure bearings to BT's. Used an EDM to measure distances. See associated Map of Survey dated September 19, 2024 for survey-related information.

RESTORATION BY, STAMP AND DATE:

Work performed May 30, 2024
Survey completed September 19, 2024

Jason L. Hatfield, PLS

USDA FOREST SERVICE
NORTHEAST OREGON LAND ZONE
1550 Dewey Avenue, Suite A
Baker City, OR 97814
(541) 523-1283

FILED October 24, 2024
BAKER COUNTY SURVEYOR
SURVEY NO. 8-37-193

