


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by W. B. Barr under GLO contract no. 388, dated May 7, 1881.

Surveyor's General records state:

Marked basalt stone 12 x 12 x 8 ins for 1/4 sec corner. Dug pits as per instructions. No Mound.

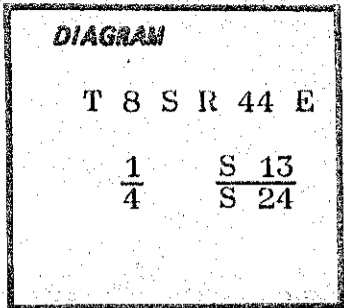

Description of corner evidence found:

Found a lava stone 12 x 12 x 8 ins in a mound of two other stones. Did not find any markings on stone which is 40 feet south of an east-west fence line.

Description of monument and accessories established to perpetuate the original location of this corner:


Set a 2½ inch brass cap on a 1 inch iron pipe, 31 inches long and projecting 3 inches above the ground. Buried stone of proper dimensions alongside and north of brass cap.

Brass cap marked thus: T 8 S R 44 E

$\frac{1}{4}$  •  $\frac{S 13}{S 24}$

CS 1980

I hereby certify that the above described corner monument was properly re-established under my supervision by Bill Hanley (ORLS 1639) on Sept. 24, 1980, and witnessed by Jim DeMastus.

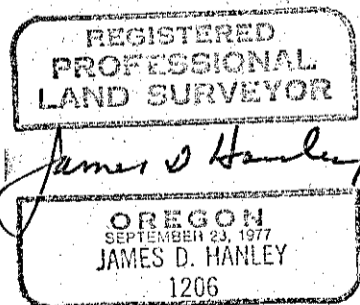

Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-51 (9/71)

FILED Oct. 16, 1980  
 BAKER COUNTY SURVEYOR  
 SURVEY NO. 8-44-8