

Page 2: 1/4 cor. Sec. 15-16, T8S, R44E.W.M.

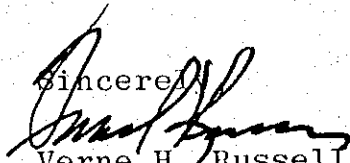
During the course of a later survey, No. 8-44-4, done by James Hambleton, a marked stone with a 1/4 chisled on one face was found by Mr. Hambleton and used by him as the proper location of this 1/4 corner.

During my field investigation of this corner, I found the stone as referred to by Mr. Hambleton which has been disturbed and lying flat on the ground. By using the field notes of the Government retracement survey between said Sections 15 and 16 and by using the topographic calls in these notes and by measuring the distances called for there in, it is my conclusion that the marked stone as found by Mr. Hambleton more closely defines the original position of this corner.

Mr. Hanley's corner bears N 01° 00' 45" E, 38.14 feet as per Mr. Hambleton's survey.

I would, therefor, recommend that this corner be re-established to conform to the position of the marked stone and corrections be made to conform to its new location.

Sincerely,


Verne H. Russell
Wallowa County Surveyor
O.R.L.S. No. 427

Enc.

Survey No. 8-44-2, 8-44-3, 8-44-4
Copy of the Original Field Notes 1899
" " " Retracement " " 1924