


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by W. Barr in 1881, set Lava rock, 16"x10"x6" in mound of stone.

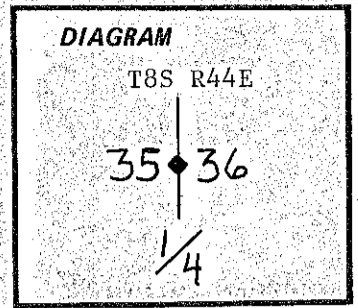


Description of corner evidence found:

I find rough Lava rock 18"x12"x8" lying in small collar of stone, marked 1/4 on on rough face.

Description of monument and accessories I established to perpetuate the original location of this corner:

In the position of the found stone I,
Set 5/8"x30" iron rod, 12" in ground in mound of stone. Placed original stone on North side of iron pipe.
Iron rod has 1-1/2" aluminum cap marked as shown hereon.
Set 6' steel fence post 2 feet North with 54-9 sign.

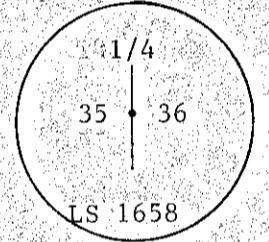

Witness by: W. Kleiman

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Ronald H. Schulson

OREGON
JULY 14, 1978
RONALD H. SCHULSON
1658

Office of..... County of Baker
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

FILED July 31, 1986
BAKER COUNTY SURVEYOR
SURVEY NO. 8-44-140