

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


T-21

**History of original corner establishment:**

Corner established by W.B. Barr under GLO contract No. 358 and dated June 14, 1880.

Surveyor General records state:

Marked basalt rock 16 x 8 x 6 ins for 1/4 Sec corner, raised mound of rocks as per instructions.

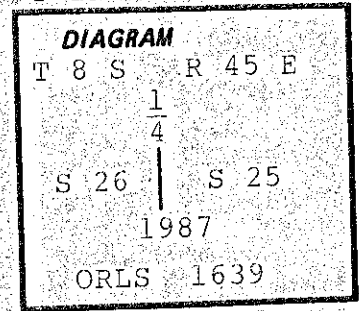

**Description of corner evidence found:**

Did not find corner stone or mound after thorough and diligent search, this area has been previously searched by others (BLM) as evidenced by numerous overturned rocks.

**Description of monument and accessories established to perpetuate the original location of this corner:**

At position midway between adjacent section corners North and South as determined by survey...

Set 2 1/2" aluminum cap on 2" aluminum pipe 10" in ground to bedrock, 20" projecting out of ground with surrounding rock mound and 6' fence post alongside with sign 54-9 attached. Cap marked as shown in diagram.

There being no trees within limits, bearing objects established: A basalt boulder 26 x 20 x 10" brs N18° E, 71.3' dist mkd "BXO" on its South center top. A basalt boulder 40 x 20 x 15" brs N55 1/2° W, 140.4' dist mkd "BXO" on its center top.

Each bearing object is painted red.

Compass declination 20° East.

I hereby certify that the above described corner monument was properly re-established by me and witnessed by Jim DeMastus on June 10, 1987.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William L. Hanley*

OREGON  
JULY 14, 1978  
WILLIAM L. HANLEY  
1639

Office of..... County Surveyor..... County of Baker  
State of..... Oregon..... I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

FILED 12-3-87  
BAKER COUNTY SURVEYOR  
SURVEY NO. 8-45-135