


# RECORD OF LAND CORNER MONUMENTATION

CORNER: SOUTHWEST 1/16 COR. SECTION 4, T. 8 S., R. 46 E., W.M.

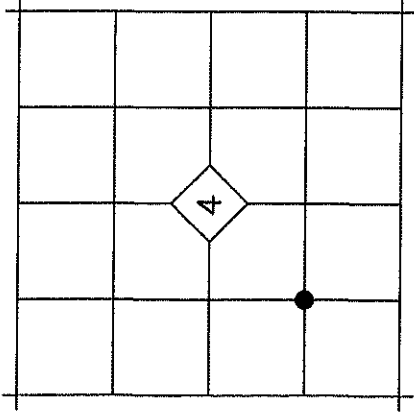

(CORNER NOT PREVIOUSLY ESTABLISHED)

**ORIGINAL DESCRIPTION:** N/A


**EVIDENCE FOUND:** N/A

## DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

At the corner point, as determined by survey, I set a 5/8"x12" iron pin with attached 2" aluminum cap 15" in the ground. Corner falls in the gravel surface of Sunny Dell Lane. Top of cap is 3" below the surface, and is marked as shown below.

From which, I SET THE FOLLOWING NEW REFERENCE POINTS:

- ▶ A 5/8"x12" iron pin bears N.00°21'09"E., 30.00 ft. with attached yellow plastic cap marked BENCHMARK SURVEYING.
- ▶ A 5/8"x24" iron pin bears S.00°21'09"W., 30.00 ft. with attached yellow plastic cap marked BENCHMARK SURVEYING.



Used RTK GPS to measure the reference points. Bearings are based on associated Map of Survey dated August 27, 2019.

## RESTORATION BY, STAMP AND DATE:

Work Performed August 27, 2019 by:

Jason L. Hatfield, PLS

BENCHMARK LAND SURVEYING, INC.

1207 Dewey Avenue

Baker City, OR 97814

(541) 523-5852

www.benchmarkls.com



*Jason L. Hatfield*  
**OREGON**  
NOVEMBER 30, 2007  
JASON L. HATFIELD  
#69454

EXPIRES: 6/30/2021

FILED September 4, 2019

BAKER COUNTY SURVEYOR

SURVEY NO. 8-16-163