


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This corner was originally established by William Elmer under Mineral Survey No. 599, during August and September 1905. The original notes state that at the corner a scribed tamarack post $4\frac{1}{2}$ ' long by $5\frac{1}{2}$ " sq. was set 2' in the ground and surrounded with a mound of earth from which:

A 20" tamarack bears N26°30'E-7.50' scribed S.E.E.C. 599 D.D. B.T.

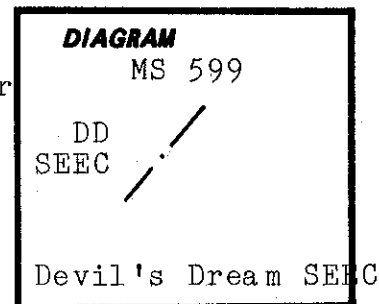

Description of corner evidence found:

Found a mound of earth with a hole in the middle from which:

A 25" western larch bears N28°E-8.3' with visible scribing on partly healed blaze (original bearing tree).

Also, found the remains of the original scribed post lying on the mound.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a $2\frac{1}{2}$ " by 30" aluminum pipe with a $2\frac{1}{2}$ " aluminum cap 26" in the ground and surrounded with a mound of earth and stone. Placed the remains of the original post on the mound. From the new monument:

A 7" white fir bears S27 $\frac{1}{2}$ °W-40.0' scribed SEEC-DD-599 BT. New bearing tree has a brass washer stamped PLS 1106 nailed to face of blaze. Attached signs 54-3 and 54-9 to each bearing tree and painted face of blaze and a 6" red band around each bearing tree. Set steel fence posts on National Forest Boundary SW and NE of corner and attached sign 54-9 to one post and sign 54-2 to both posts.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

This corner was remonumented on August 30, 1985.

Witness: John Tuttle

Cap is marked:
MS 599

DD
SEEC

1985
PLS 1106

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Office of..... County Surveyor..... Baker
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED 10-29-85

☆ GPO-798-278

BAKER COUNTY SURVEYOR

SURVEY NO. 9-36-74