


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

The corner was originally established by Charles Foster under Mineral Survey No. 421, during August 1901. The original notes state that at the corner a scribed pine post  $4\frac{1}{2}$ ' long by 4" sq. was set 18" in the ground and surrounded with a mound of earth.

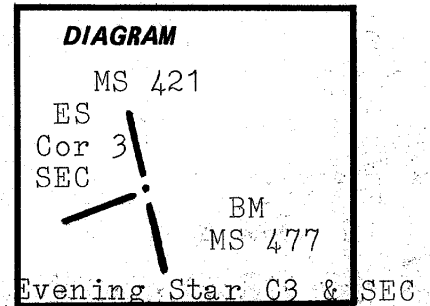

**Description of corner evidence found:**

Found a mound of earth with rotted remains of original post in the hole.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Set a  $2\frac{1}{2}$ " by 30" aluminum pipe with a  $2\frac{1}{2}$ " aluminum cap 22" in the ground and surrounded with a mound of earth and stone. from which:

A 7" white fir bears N44°E-20.2' scribed 3-SEC-ES-421 BT.

An 8" white fir bears S37 $\frac{1}{2}$ °E-7.1' scribed 3-SEC-ES-421 BT.


New bearing trees have a brass washer stamped PLS 1106 nailed to the face of blaze. Attached signs 54-9 and 54-3 to each bearing tree and painted the face of blaze and a 6" red band around each bearing tree. Set steel fence posts on National Forest Boundary SW and SE of corner and attached sign 54-9 to one post and sign 54-2 to both posts.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

This corner was remonumented on July 24, 1985.

Witness: John Tuttle

Cap is marked:

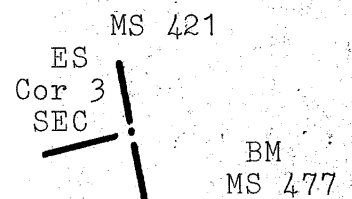

1985 PLS 1106

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

Office of.....County Surveyor.....County of.....Baker  
State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the...27... day of.....Aug....., 19.85  
..... by .....  
(COUNTY OFFICIAL) (DEPUTY)