


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The corner was originally established by Arthur Philbrick under Mineral Survey No. 477, during June and July 1902. The original notes state that a 7" high by 10" square black pine stump witness corner was marked by a nail, N9°09'W-0.4' from the true corner point from which:

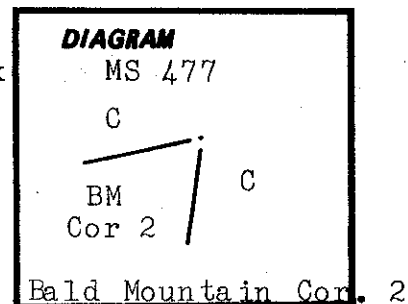

A 6" red fir bears S64°E-13.9'.
A 10" tamarack bears N3°W-21.6'.
Both from true corner point and scribed B.T.B.Mt.2-477.

Description of corner evidence found:

An 18" western larch stump bears N6°E-21.6' to face of blaze and 22.0' to center line with catface (original bearing tree).
Original corner tree with visible scribing lying beside skid road about 30' Southeast of corner.
Re-established corner position by record distance measurement from face of blaze of found bearing tree stump and by record measurement to Kitchi Cor. 4.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2½" by 30" aluminum pipe with a 2½" aluminum cap 22" in the ground and surrounded with a mound of earth and stone from which:

A 9" engleman spruce bears S19½°E-39.2' scribed 2-BM-477 BT.
A 19" western larch bears S11½°W-48.8' scribed 2-BM-477 BT.
New bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached signs 54-3 and 54-9 to each bearing tree and painted face of blaze and a 6" red band around each bearing tree. Set steel fence posts on claim line near corner and attached sign 54-9.

Used steel tape and staff compass with 20°E declination, measured to the center of the bearing trees.

Cap is marked:
MS 477

C

BM
Cor 2

C

1985
PLS 1106

This corner was remonumented on August 28, 1985.

Witness: John Tuttle

REGISTERED
PROFESSIONAL
LAND SURVEYOR

William R. Wells

OREGON
JULY 22, 1977
WILLIAM R. WELLS
1106

Office of..... County Surveyor..... County of..... Baker
State of..... Oregon..... I hereby certify that the within instrument was filed in this office
for record on the...8... day of.....Oct....., 1985
..... by
(COUNTY OFFICIAL) (DEPUTY)