


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Z-25

History of original corner establishment:

Corner originally established in 1881 by Eugene P. McCormack under GLO Contract No. 398. Surveyor General records state: Set Post 4 ft long 4 ins square 24 ins in the ground for cor to Tps 9 and 10 S Rs 37 and 38 E marked T9S S31 on NE, R38E S6 on SE, T10S S1 on SW, and R37E S36 on NW faces with 6 notches on each edge from which

- A Pine 22 ins diam bears N20°E 28 lks dist marked T9S R38E S31 BT
- A Pine 30 ins diam bears S18°E 77 lks dist marked T10S R38E S6 BT
- A Pine 30 ins diam bears S70°W 90 lks dist marked T10S R37E S1 BT
- A Pine 24 ins diam bears N40°W 53 lks dist marked T9S R37E S36 BT

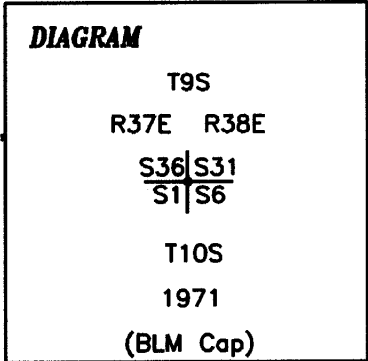

In 1971 the BLM determined the original corner location from the remains of the original bearing trees at record bearing and distance. At the original corner location they set an I.P. 2 1/2" x 30" 24" in the ground stamped as shown in the corner diagram. They also buried a basalt stone 12" x 6" x 3" with an X chiseled on the south face alongside the I.P.

Description of corner evidence found:

- 2 1/2" iron pipe with brass cap stamped as shown in corner diagram, flush with ground in stone mound. Corner monument is solid and in good condition. Bearing trees established by the BLM in 1971:
- 10" Ponderosa Pine, with healed blaze, bears N41°E 40 links distance.
- 11" Ponderosa Pine, with healed blaze, bears S22°E 53 1/2 links distance.
- 10" Ponderosa Pine, dead and down with visible scribing, bears S72°W 71 links distance.
- 10" Ponderosa Pine, with visible scribing, bears N68°W 39 links distance.

Other bearing tree:

- 9" Ponderosa Pine, with face pitched over and unreadable, bears S56°19'W 5.2' distance (PLS 848).


Original bearing trees:

- 22" Ponderosa Pine, 4' high stump with no visible scribing, bears N20°E 28 links distance.
- Rotted, decayed Ponderosa Pine stump with visible scribing, bears S18°E 79 links distance (Record 77 links).
- 30" Ponderosa Pine, 4' high stump with visible scribing, bears S75°W 92 links distance (Record S70°W 90 links).
- 24" Ponderosa Pine, 5' high stump with visible scribing, bears N40°W 52 links distance (Record 53 links).

Description of monument and accessories I established to perpetuate the original location of this corner:

- Set 6' aluminum fencepost with 54-2 and 54-9 signs 5' west of corner monument. Paint bearing trees.

Date: July 24, 1997

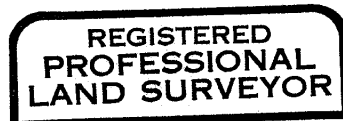

Kenneth A. Lind



Renews 12/31/98

FILED 9-9-97
BAKER COUNTY SURVEYOR
SURVEY NO. 9-37-257

Office of.....County Surveyor..... County of.....Baker.....
State of.....Oregon....., I hereby certify that the within was filed in this office
for record on the..... day of....., 19.....
..... by
(COUNTY OFFICIAL) (DEPUTY)