


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 corner of Section 29, T9S, R37E, W.M.

History of original corner establishment:

Corner was established by James Hanley, Baker County Surveyor in 1974, see Survey No. 9-37-5. The record states that a 2" aluminum cap on a 1" iron post was set. The survey map also indicates that the N-S mid section line is not valid.

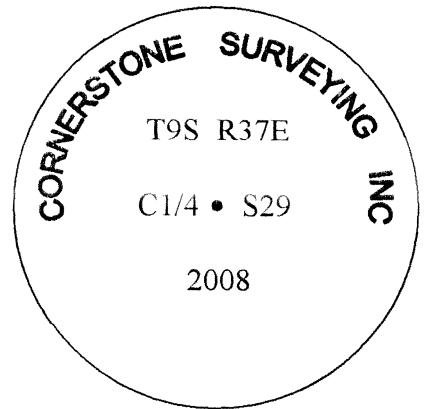

Description of corner evidence found:

Found an aluminum capped monument as shown on Survey No. 9-37-5. The two bearing trees where both dead and down.

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

Jack L. Watson
OREGON
SEPT 19, 1995
JACK L. WATSON
 2734

Renewal Date: 6/30/2010

Description of monument and accessories set at corner location:

Set a 2½"x30" aluminum pipe with attached 3½" aluminum cap, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

- A 7" Fir bears N16°W, 19.5 ft., marked C1/4S29BT.
- A 6" Fir bears N50°E, 21.8 ft., marked C1/4S29BT.
- A 5/8"x30" iron pin bears N89°07'E, 3.89 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
- A 5/8"x30" iron pin bears S01°40'11"E, 86.93 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
- The monument set in Survey No. 9-37-5 bears S88°45'E, 6.69 feet.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination.

Witnessed by: Corey Watson
 Date: September 15, 2008

Office of County of
 State of, I hereby certify that the within instrument was filed in this office
 for record on the day of, 2008.
 by
 (COUNTY OFFICIAL) (DEPUTY)

T-7

FILED September 22, 2008
 BAKER COUNTY SURVEYOR
 SURVEY NO. 9-37-292