

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. P-13-14

History of original corner establishment:

None.

DIAGRAM

T10S R35E
WW 1/64
C —+— C
S22

Description of corner evidence found:

None.

Corner falls on gentle west slope, about 125' east of track road.

Description of monument and accessories | established to perpetuate the original location of this corner:


At surveyed point set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 24" in the ground and mound of stone around to cap.
From which by magnetic declination of N20°E: A 13" pine bears S82°E, 61.9 ft. scribed CWW1/64S22 BT. An 11" pine bears N71°W, 41.5 ft. scribed CWW1/64S22 BT. Painted blazes red and 6" red band around. Placed 54-3s and brass washers stamped PLS 1051 on BTs. Placed 54-2 and 54-9 on steel fence post 5' west and 54-2 on steel fence post 5' south of the corner.

T10S R35E
WW 1/64
C —+— C
S22
OR PLS 1051
1980

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Daniel Rowland
Larry Shirley

August 7, 1980

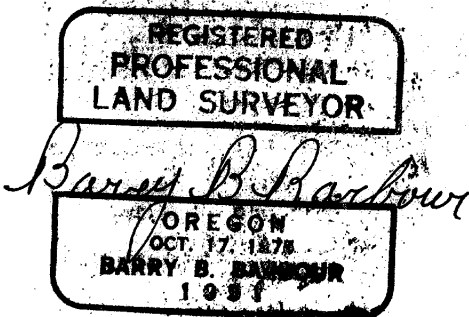

Office of... County Surveyor... County of... Baker
State of... Oregon... I hereby certify that the within instrument was filed in this office
for record on the 20th day of... January... 1981

(COUNTY OFFICIAL)

(DEPUTY)

FILED Jan 20 1981
BAKER COUNTY SURVEYOR
SURVEY NO. 10-35-101