


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index file No. W-21

History of original corner establishment:

None.

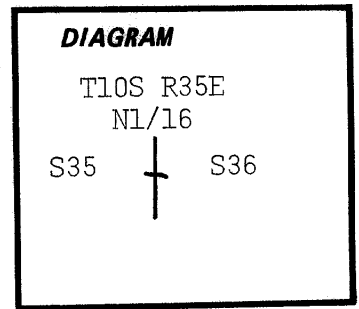

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner:

At surveyed point set 2 1/2" X 30" galvanized pipe and brass cap marked; Set pipe 25" in the ground. No rock in the area.


From which by magnetic declination of N20°E: A 12" tamarac bears S78°E, 50.1 ft. scribed N1/16S36 BT. A 9" tamarac bears N58°W, 38.5 ft. scribed N1/16S35 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-9s and brass washers stamped PLS 1051 on BTs. Placed 54-2 and 54-9 on steel fence post 5' north and 54-2 on steel fence post 5' east of the corner.

T10S R35E
N1/16
S35 + S36
OR PLS 1051
1980

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Daniel Rowland
Larry Shirley

September 8, 1980

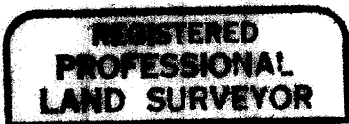

Barry B. Barbour
OREGON
OCT. 17, 1978
BARRY B. BARBOUR
1051

Office of County Surveyor..... County of Baker
State of Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 20th day of January....., 1981.
..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED Jan 20 1981
BAKER COUNTY SURVEYOR
SURVEY NO. 10-35-131

☆ GPO 799-509