

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


(Reference FSH 5681.65)

History of original corner establishment:

Set Basalt stone 12 x 10 x 10 ins., 8 in. in the ground for  $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on N. face from which;

A fir 29 in. in dia. bears N 60 E, 50 lks. dist. marked  $\frac{1}{4}$  S BT.

A pine 6 in. in dia. bears S 10 W, 19 lks, dist. marked  $\frac{1}{4}$  S BT.

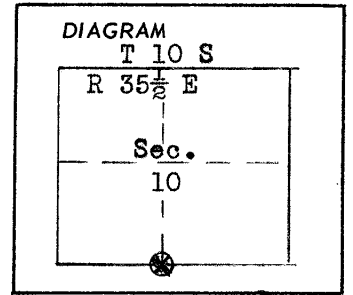

Description of corner evidence found:

Found Basalt stone 12 x 10 x 10 ins. 5 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on N. face of stone.

Found fir 31 ins. in dia. bears N 60 E, 50 lks, dist. marked  $\frac{1}{4}$  S BT.


Found pine 6 in. in dia. bears S 10 W, 19 lks. dist. marked  $\frac{1}{4}$  S BT.

Description of monument and accessories I established to perpetuate the original location of this corner

Set mound of stone about corner stone to the dimensions of 3 feet in dia. and  $1\frac{1}{2}$  feet high.

Placed bearing tree tags on both of the bearing trees, with the distance and bearing to the corner, scribed on the tags.

Placed a corner location poster on another tree with the distance and bearing to the corner scribed on the poster.

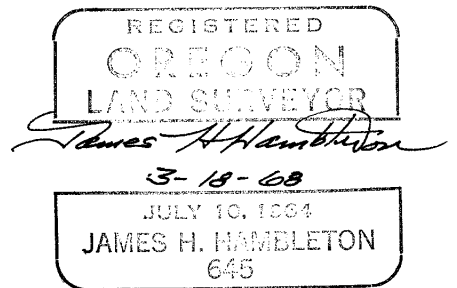

Office of County Surveyor County of Baker  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 28 day of March, 1968, at 5 o'clock P.m., (signed)  
 \_\_\_\_\_ by Tom Hawley  
 (COUNTY OFFICIAL) (DEPUTY)