


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established this survey.

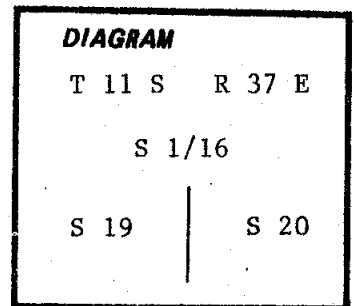

Description of corner evidence found:

Description of monument and accessories established to perpetuate the original location of this corner.


Set a 2½ inch brass cap on a 2 inch iron pipe, 31 inches long, 26 inches in the ground with a steel fence post alongside with signs 54-2 and 54-9 attached from which:

- A pine, 6 ins. diam. bears S. 22° W., 16.0 ft. dist. marked 1/16 S 19 BT
- A pine, 9 ins. diam. bears S. 54° W., 31.5 ft. dist. marked 1/16 S 19 BT

Each BT has a sign 54-3 attached below a band of red paint and has a brass washer marked LS 1206 nailed flush with BT blaze.

Brass cap marked thus: T 11 S R 37 E

S 1/16
 S 19 | S 20
 1978
 ORLS 1206

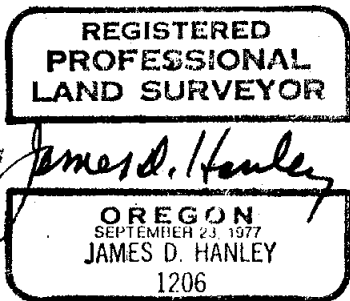

I hereby certify the above corner was established on June 16, 1978, witnessed by T. Hanley, R. McKim and T. Fisk.

Office of.....County Surveyor.....County of.....Baker
 State of.....Oregon.....I hereby certify that the within instrument was filed in this office
 for record on the.....day of....., 19.....
 by.....
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED 6-30-78

COUNTY SURVEYOR

FILE NO. 11-37-23