


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

S-17

History of original corner establishment:

N/A

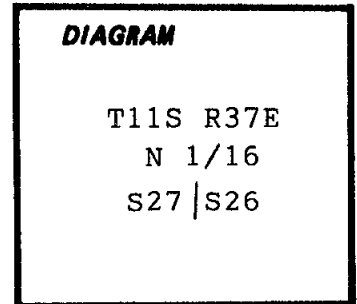

Description of corner evidence found:

N/A

Description of monument and accessories established to perpetuate the original location of this corner:

T11S R37E
N 1/16
S27 | S26
1995
LS 896

Set: 2½"x30" alum. pipe with a 2½" alum. cap 24" in ground to bedrock. No stone available. Stamped:

Marked:


13" Ponderosa Pine N19½W--22.7' Scribed N 1/16 S27 BT.

11" D-Fir N84½E--14.2' Scribed N 1/16 S26 BT.


Nailed 54-9 and 54-3 signs to BT's, painted bands and blazes red and nailed a 1" brass disk stamped PLS 896 flush between the B and T.

Set guard post West with 54-2 and 54-9 signs.

Bearings are true by instrument tie.

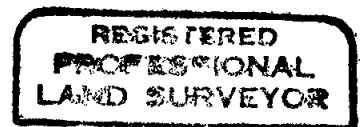

Larry D. Bishop

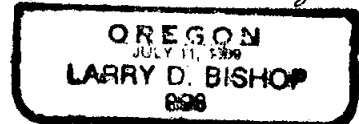

Expires 12/31/95

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

*GPO-591-971, 1988

FILED FEB. 4, 1998
BAKER COUNTY SURVEYOR
SURVEY NO. 11-37-108