

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established

T 11 S R 39 E Q-12

	S	21	

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:

At position by survey, I set a 5/8" iron pin, 28" in the ground with a 2 1/2" aluminum cap, in a 1' diam. collar of stone, from which:

NEW BEARING OBJECTS:


A 5" Ponderosa Pine bears North 75° East, a dist. of 32.45 ft, marked SE 1/16 S21 BT
A 16" Ponderosa Pine bears North 20° West, a dist. of 33.40 ft, marked SE 1/16 S21 BT

Set steel fencepost 1 ft. North

Monument falls on steep SE aspect

I hereby certify that the corner was monumented on June 19th, 2024.

Witnesses: Kyle Tucker, Adam Gordon

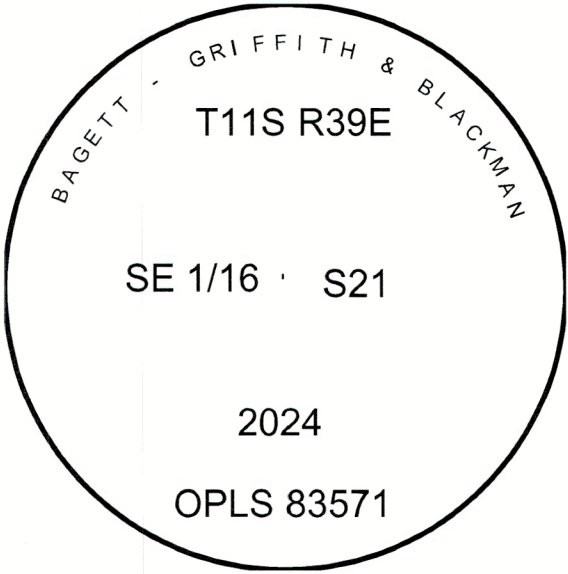

Renewal Date: June 30, 2025

I use a tape and compass in the establishment of the new bearing objects. I use 14° East declination. Bearings are measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

FILED July 3, 2024
BAKER COUNTY SURVEYOR
SURVEY NO. 11-39-199