

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:  
Corner not previously established

T 11 S R 39 E Q-13

|  |   |    |  |
|--|---|----|--|
|  |   |    |  |
|  | S | 21 |  |
|  |   |    |  |
|  |   |    |  |

DESCRIPTION OF CORNER EVIDENCE FOUND:  
None

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE ORIGINAL LOCATION OF THIS CORNER:  
At position by survey, I set a 5/8" iron pin, 29" in the ground with 2 1/2" aluminum cap, in a 2 foot diam. collar of stone, from which:

NEW BEARING OBJECTS:


A 16" Engelmann Spruce bears North 69° East, a dist. of 50.90 feet, marked S 1/16 S22 BT.  
A 5" Ponderosa Pine bears North 46° West, a dist. of 26.55 feet, marked S 1/16 S21 BT.

Set steel fencepost 0.5 feet North.

Monument falls in flood plain of mountain stream

I hereby certify that the corner was monumented on June 19th, 2024.

Witnesses: Kyle Tucker, Adam Gordon

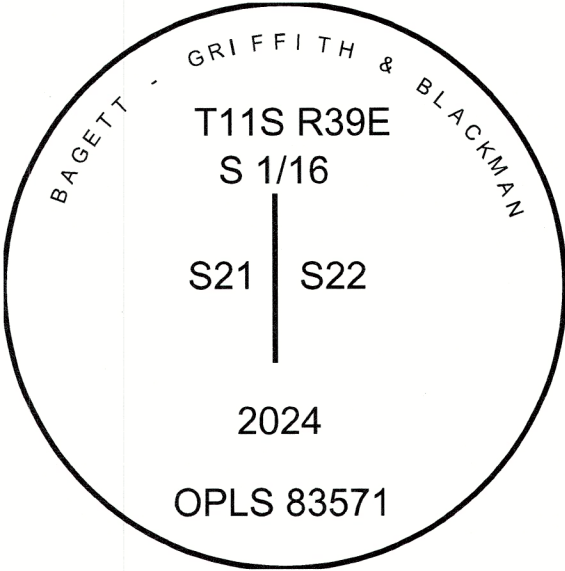

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR  
  
OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2025

I use a tape and compass in the establishment of the new bearing objects. I use 14° East declination. Bearings are measured to a brass washer labeled "OPLS 83571" in the BT blaze at the base of the tree. Distances are to a 60D nail in the right side of the base of the center of the tree.

FILED July 3, 2024  
BAKER COUNTY SURVEYOR  
SURVEY NO. 11-39-200