

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX No. R-1

History of original corner establishment:  
Corner was originally established in 1874  
by Benjamin Vaughan, under General Land  
Office Contract No. 211. Surveyor General  
notes state: Set stone 14x12x8. for cor.  
secs. 19, 30, 24, 25 from which:

A Pine 20 ins. diam. bears S75E 301ks dist.

In 1939, Otis O. Gould, under investigative group  
No. 163 for The General Land Office, re-monumented this corner from  
the original stone and the remains of the original BT.

DIAGRAM

T11S T11S

S19

S25+-----

1830

R40E R41E

1939

(GLO)

Description of corner evidence found:

Found 2-1/2" iron pipe with 3" brass cap stamped as shown in the  
DIAGRAM. Corner monument is solid and in good condition.

All previously established accessories have been rendered useless  
in the long term by the 1989 fire. Refer to the above referenced  
notes.

Description of monument and accessories I established  
to perpetuate the original location of this corner:

Set 1/2" x 24" iron pins with aluminum caps as follows:  
S30-19'E, 6.3 ft., stamped NW S30, RM with an arrow and course to the  
corner.



N76-49'W, 9.9 ft., stamped S25, RM with an arrow and course to the  
corner.

N48-46'E, 9.2 ft., stamped SW S19, RM with an arrow and course to the  
corner.

N84-34'E, 98.01 ft., stamped SW S19, RM with an arrow and course to  
the corner. This pin is part of the survey control network. Set a  
steel post with warning sign along side this pin.

Measurements to pin taken with electronic tachimeter with angles  
turned from the survey control network.

Set steel posts with Forest Bdy. signs 2' North and 3' South.

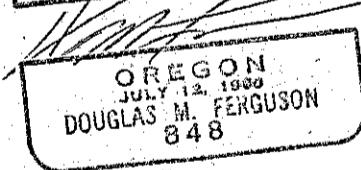

This work is performed by:  
Douglas M. Ferguson PLS 848  
D. Mitchell Ferguson & Ken H. Delano  
On June 6, 1990  
Refer to Baker Co. Survey No. 11-41-11

Office of \_\_\_\_\_ County of \_\_\_\_\_  
State of \_\_\_\_\_ I hereby certify that the within instrument was filed  
in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_\_  
by \_\_\_\_\_

(COUNTY OFFICIAL)

(DEPUTY)

FILED Jan. 4, 1991

BAKER COUNTY SURVEYOR

SURVEY NO. 11-41-11