


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 11 S R 43 E Q-09



DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At position determined by survey, I set a 5/8"x30" iron pin rebar with 2 1/2" aluminum cap, marked as shown, 28 inches in the ground, from which:

NEW BEARING OBJECTS:

A 5/8"x30" iron pin bears South 0°10'55" West, a distance of 46.07 feet, with yellow plastic cap marked BGB SURVEY MARKER.

A 5/8"x30" iron pin bears South 89°59'52" East, a distance of 50.00 feet, with 1 1/2" aluminum cap marked BGB SURVEY MARKER E RP.

I hereby certify that the corner was monumented on February 2, 2023.

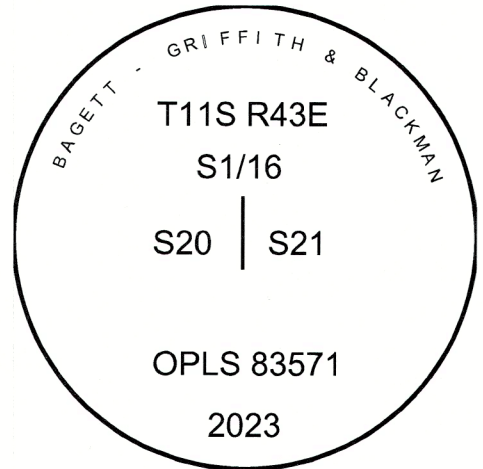

Renewal Date: June 30, 2023

I used a Leica GS18 RTK GPS receiver in the establishment of the accessories. Basis of Bearing is OCRS Baker Zone. Bearings and distances are to the center of the caps.

Q-09

FILED February 8, 2023
BAKER COUNTY SURVEYOR
SURVEY NO. 11-43-29