


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Herman D. Gradon under GLO contract no. 428 dated Dec. 16, 1881.

Surveyor General records state:

Set a basalt stone 20 x 10 x 8 ins 15 ins in the ground for 1/4 sec cor marked 1/4 on N face, dug pits 18 x 18 x 12 ins east and west of stone 5 1/2 feet dist and raised mound of earth 1 1/2 feet high and 3 1/2 feet base alongside.

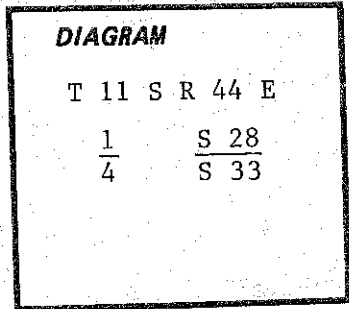

Description of corner evidence found:

Found a stone 22 x 10 x 8 inches in an old fence corner from which the fence bears south and east. No markings identified on this stone and no other stones found in the area of proper size.

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2 1/2 inch brass cap on a 1 inch iron pipe 31 inches long and projecting 6 inches out of the ground. Buried original stone 1 foot north of brass cap.


Brass cap marked thus:

T 11 S R 44 E

$\frac{1}{4}$ $\frac{S 28}{S 33}$

CS 1981

I hereby certify that the above described corner monument was properly established under my direct supervision on Sept. 11, 1981, and witnessed by Jim DeMastus and Dick D'Ewart

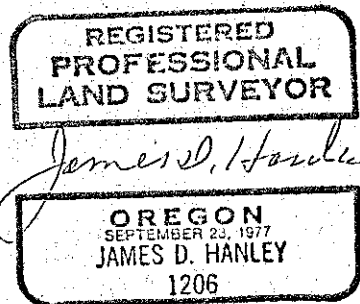

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

FILED Oct 16, 1981
 BAKER COUNTY SURVEYOR
 SURVEY NO. 11-44-10