

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Henry W. Cooke under Contract No. 427 and dated December 15, 1881.

Surveyor General records state:

Set basalt stone 14 x 12 x 10 ins 10 ins in ground for 1/4 sec cor marked 1/4 on N face and raised a mound of stone alongside.

V-19

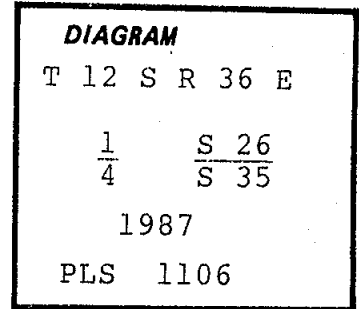

Description of corner evidence found:

Found 12 x 11 x 9" (record, 14 x 12 x 10") marked 1/4 on N face, mound of stones to north of corner stone.

Description of monument and accessories established to perpetuate the original location of this corner:

At position of found stone...

Set 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap 22" in the ground, surrounded with mound of earth & stone. Cap marked as shown in corner diagram. Buried original stone alongside.

New bearing trees established:

A 11" p pine bears N63°W, 15.0' scribed 1/4S26 BT.

A 10" p pine bears S30°W, 53.2' scribed 1/4S35 BT.

New bearing trees have a brass washer stamped PLS 1106 nailed to face of blaze. Attached signs 54-3 & 54-9 and painted face of blaze and a 6" band of red around each BT. Set steel fence post East of corner and attached sign 54-9.

Compass declination 19° East.

I hereby certify that the above corner monument was properly remonumented to U.S.F.S. standards under my supervision and witnessed by Bill Blanford on May 30, 1987.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William R. Wells*

OREGON  
JULY 22, 1977  
WILLIAM R. WELLS  
1106

Office of..... County Surveyor..... County of..... Baker  
Oregon  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)