

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of Original Corner Establishment:

This quarter corner was established by Reuben R. Leigh, Deputy Surveyor under Contract No. 462 and being dated April 11, 1883. His notes states he set a Basalt stone 24" x 16" x 16" buried 18 inches in the ground for the 1/4 corner common to Sections 14 & 23, T 12 S, R 39 E W.M., marked 1/4 on the North face and raised a mound of stone alongside.

## Description of Corner Evidence Found:

At the location of this one quarter corner I found a large Basalt stone measuring 24" x 16" x 16" as shown in the accompanying photo, of which fits the description of the stone Reuben R. Leigh said he had set. Stone is marked 1/4 on the North face with a small mound of stone alongside.



Found a Basalt stone 24" x 16" x 16" in place and marked 1/4 on the North face, as described by Reuben R. Leigh. Notice the large marks 1/4 being visible in the photo.

## Description of Monument and Accessories I Established to Perpetuate the Original Location of Corner:

To perpetuate this 1/4 corner, at the exact location of the stone, I set a 2 inch Brass Cap on a 1" x 30" galvanized iron pipe. I buried the pipe to within 8 inches above the ground surface. The original stone was turned upside down and buried on the North side of the new monument with the marks facing the pipe. I then placed a mound of stone and soil three feet in diameter about the monument. The brass cap monument is stamped as shown in the accompanying photo.


I then set four bearing trees as follows:

A Juniper 20" in diameter, which bears N 53° 00' W, 65.00 feet horizontal distance and scribed 1/4 S S 14 T 12 S R 39 E BT.

A Pine 5" in diameter, which bears N 59° 00' E, 16.75 feet horizontal distance and scribed 1/4 S S 14 T 12 S R 39 E BT.

A Pine 9" in diameter, which bears S 17° 00' E, 105.20 feet horizontal distance and scribed 1/4 S S 23 T 12 S R 39 E BT.

A Juniper 15" in diameter, which bears S 37° 00' W, 33.75 feet horizontal distance and scribed 1/4 S S 23 T 12 S R 39 E BT.

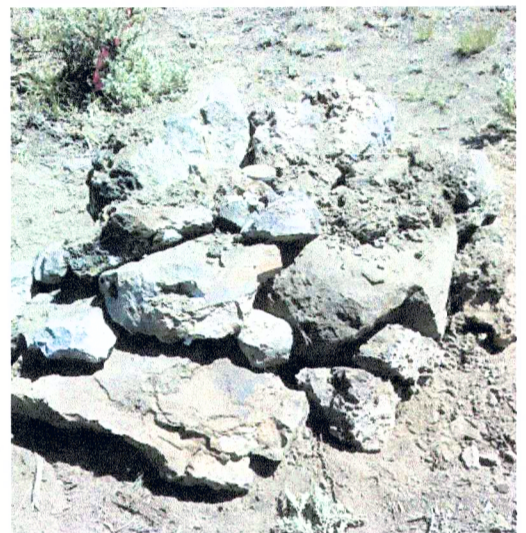

Set brass cap monument to within 8" of the surface in a mound of stone 3 feet at base around monument. Original stone is buried in the mound on the North side of monument.



Brass Cap as stamped.

This 1/4 corners true geographic position.  
44° 30' 55.52362" N, 117° 54' 4.16942" W NAD83

I, James H. Hambleton certify that this corner was properly reestablished as witnessed by John Eggers on July 24, 2012.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*James H. Hambleton*

OREGON  
JULY 10, 1964  
JAMES H. HAMBLETON  
645

Renews June 30, 2014

FILED Sept. 27, 2012  
BAKER COUNTY SURVEYOR  
SURVEY NO. 12-39-53